



1. For point to point DIY soldering
2. Material: single-sided printed circuit board copper
3. Hole diameter: about 1mm
4. Hole spacing: Standard 2.54MM
5. Size: 5×7CM
6. 7*9CM, 9*15CM at Optional
7*9CM--- add 0.05USD/PC
9*15cm---add 0.11USD/PC

**5x7cm DIY Prototype
Paper PCB Universal
Circuit Breadboard**

Order Quantity


Sample(50-100pcs)

101-1000pcs

1001-3000pcs

3001-5000pcs

>5000pcs

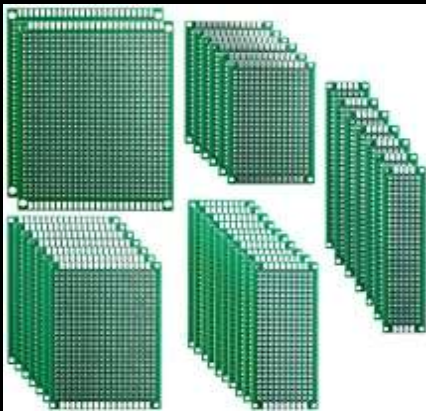

- 9 * 15CM double-sided spray 1.6 thick 2.54 pitch
Hole center distance: 2.54MM
Aperture: 0.95MM
Thickness: 1.6MM
Other Size at optional:
2*8CM--0.1USD/PC
3*7CM--0.11USD/PC
4*6CM--0.15USD/PC
5*7CM--0.18USD/PC
7*9CM--0.33USD/PC

**9x15cm Double-sided
spray tin PCB
Universal Circuit
Breadboard**

Order Quantity

Sample(20-100pcs)

101-1000pcs

1001-3000pcs

3001-5000pcs

>5000pcs

**180*300*0.4mm Soft thin
pcb flexible single Side pcb
FR4 breadboard circuit
board DIP SMD PCB Peg**

Order Quantity


Sample(20-100pcs)

101-1000pcs

1001-3000pcs

3001-5000pcs

>5000pcs

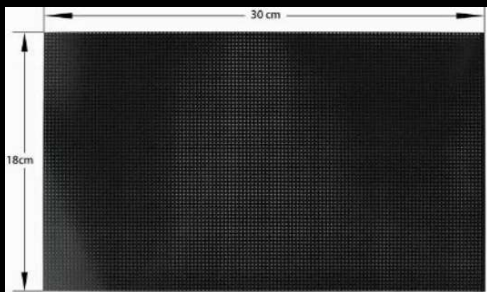

- Substrate material: high quality FR-4;
Thickness: 0.4mm;
External size: 18*30CM (cm);
Aperture: 1.0mm (mm. Error 5%);
Hole spacing: 2.54mm (100mil) (mm);
The soft universal board can be folded without deformation.



1. One Terminal Strip:Tie-point 25
2. Material:ABS plastic
3. Bread size: 20mm *15mm
4. Base plate size : 92.

**25 tie-points
solderless Breadboard**

Order Quantity


Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K

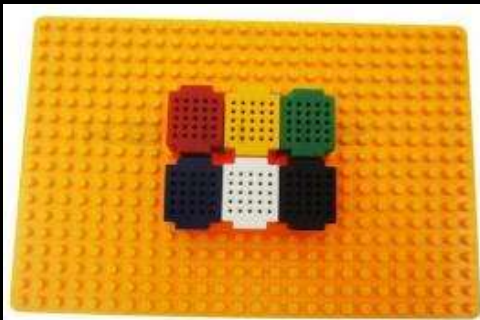

1. One Terminal Strip:Tie-point 25
2. Material:ABS plastic
3. Base plate size : 92.5x132.5mm
4. Bread size : 20mm *15mm
5. Packing List: 6pcs mini breadboard, 1pc base Plate
- 6) Color: Black, White, Green, Yellow, Blue, Red

**6pcs 25 tie-points
colorful solderless
super mini Breadboard
with 1pc base plate**

Order Quantity

Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



1. One Terminal Strip: Tie-point 170
2. Material:ABS plastic
3. Color : White, Green, Red, Black, Yellow
4. Dimensions: 45.5x34.5x9.5mm

**Breadboard 170 Tie-
points**

Order Quantity


Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



- 1. One Terminal Strip: Tie-point 170
- 2. Material: ABS plastic
- 3. Color :transparent
- 4. Dimensions: 45.5x34.5x9.5mm

**transparent
Breadboard
170 Tie-points buckle**

Order Quantity


Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K

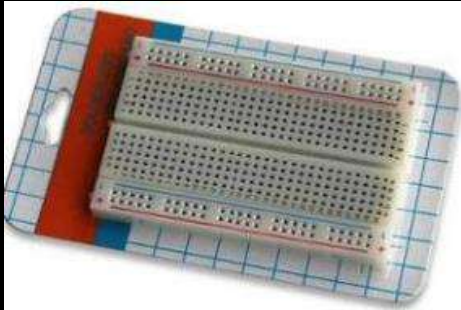

- 1 terminal Strip:tie-point 300
- 2 Distribution Strips: tie-point 100
- 3. Size: 8.3 x 5.5 x 0.85 cm
- 4. material: ABS pla

**400 Tie Points Bread
board
(Non-Transparent)**

Order Quantity

Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



- 1 terminal Strip:tie-point 300
- 2 Distribution Strips: tie-point 100
- 3. Size: 8.3 x 5.5 x 0.85 cm
- 4. material: ABS pla

**400 Tie Points Bread
board
(Transparent)**

Order Quantity

Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



- 1.Dimension:175* 46*8.5mm
- 2.Hole Number:700 Points
- 3.Matrix:12 rows x 60 columns
- 4.Wire size:Suitabe for 29-20 AWG wires
- 5.Material: ABS, metal reed

**SYB -120 Breadboard
700 Point Solderless
(white)**

Order Quantity

Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



- 1.Dimension:177* 46*8.5mm
- 2.Hole Number:700 Points
- 3.Matrix:12 rows x 60 columns
- 4.Wire size:Suitabe for 29-20 AWG wires
- 5.Material: ABS, metal reed
- 6.color: red, blue, green, Transparent blue

**SYB -120 Breadboard
700 Point Solderless (red, blue, green,
Transparent blue)**

Order Quantity


Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K

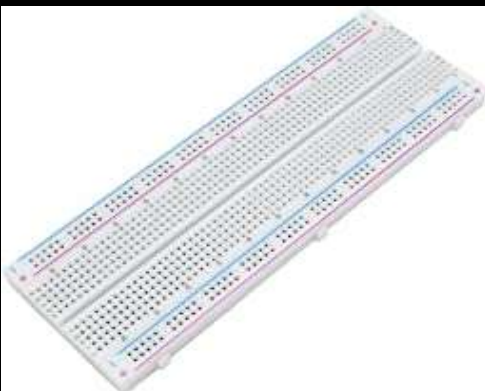

- 1.size:170mm ×60mm
2. level:0~ 60
3. vertical sequence: sequence: A ~J
- 4.power:+, -

**Breadboard 830 Point
Solderless PCB Bread
Board MB-102**

Order Quantity

Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



1. Size (CM): 16.5*5.5*0.85
2. Material: ABS, phosphor bronze nickel reed
3. terminal, 630 hole; 2decorative strip, 200 hole;
4. Pack Size:20cm x 3cm x 3cm
5. Weight:90g

830 points transparent bread board

Order Quantity

Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



1. size:175mm ×67mm ×8mm
2. level:0~ 67
3. vertical sequence: sequence: A ~J
4. power:+, -

Breadboard 840 Point Solderless PCB Bread Board GL-12

Order Quantity

Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



This is an arduino uno R3 development board of the acrylic fixed plate, the above can be installed a arduino uno R3 main board and an 8 cm * 5 cm - 400 hole bread board, screws and firm, the experiment is convenient.
Material: 12 cm * 8.3 cm A level 1 yakeli board, power supply screw 4 stars, fixed nut 4 star, 4 star gasket, four silicone mat.

experimental platform UNO R3 board fixed universal Acrylic for arduino (nvlon screw)

Order Quantity

Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K

Shipment does not contain UNO R3 mainboard and bread plate.



适用于UNO R3主板和MEGA2560主板

Can be used to secure MEGA2560 R3 and UNO R3 main control board or 2560 R3 and UNO R3 compatible board, and with LCD1602 LCD mounting hole.
Size: 19.4CM * 11.5CM* 0.3CM

experimental platform
UNO R3 and mega
2560 R3 board fixed
universal Acrylic for
Order Quantity


Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K

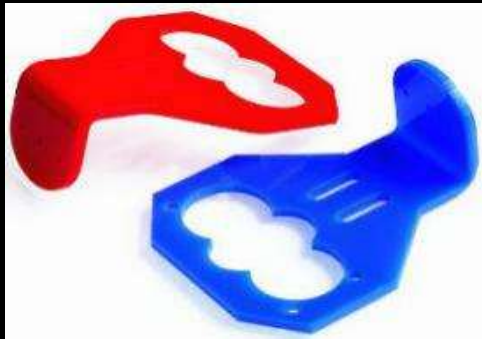

Ultrasonic HC - SR04 sensor fixed bracket (excluding ultrasonic) smart car kit

Thickness: 2.8 3.1 mm

16 mm in diameter:

Fixed hole diameter: 3.8 MM

Material: imported acrylic

USES: fixed ultrasonic sensing module and other products;

The stents and HC - SR04 only form a complete set of ultrasonic ranging module, the other can't form a complete set of ultrasonic module.

color: red, blue, Little number, can't pick the color

HC - SR04 sensor fixed bracket (red or blue)

Order Quantity

Sample(50-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



HC-SR04 Ultrasonic Sensor Mount Bracket Holder with Screws

HC-SR04 Ultrasonic Sensor Mount Bracket Holder with Screws

Order Quantity

Sample(50-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



Fixed HC - SR04 blue circuit board

With 4sets screws as the Picture

**new HC-SR04
Ultrasonic Sensor
Mount Bracket Holder
with Screws
Order Quantity**

Sample(50-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



SG90 steering gear HC-SR04 ultrasonic module acrylic transparent mounting bracket set smart car accessories

With 4sets screws as the Picture

This kit does not include HC-SR04 ultrasonic module and SG90 servo

SG90 steering gear HC-SR04 ultrasonic module acrylic bracket

Order Quantity

Sample(50-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



Fixed HC - SR04 blue circuit board

HC - SR04 Ultrasonic sensor fixed bracket

Order Quantity

Sample(50-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



This is a pyroelectric infrared sensor probe holder.

Shipments are brackets with screws. No sensor.

HC-SR501 human infrared sensor fixed bracket

Order Quantity

Sample(50-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



1. equipped with screw copper column and installation instructions.
 2. appearance size: 79.5 mm * 64.5 mm * 21 mm
 3. material: acrylic
- Only the shell, don't pack UNO board

Transparent Acrylic Case Shell For arduino uno r3

Order Quantity

Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



Carton for UNO R3

Carton for UNO R3

Order Quantity


Sample(50-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K

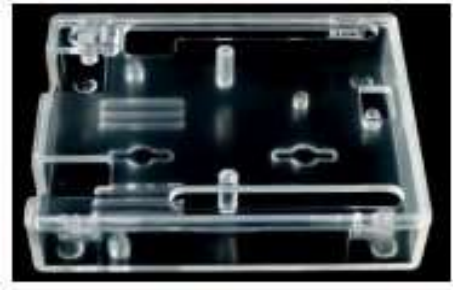

1. equipped with screw copper column and installation instructions.
 2. appearance size: 79.5 mm * 64.5 mm * 21 mm
 3. material: plastic
- Only the shell, don't pack UNO board

color : Transparent or black

Transparent ABS Plastic Shell For Arduino UNO R3

Order Quantity

Sample(50-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



Size: 114 mm long; 65 mm wide; 18 mm high
 Material: A grade acrylic
 Delivery: bulk delivery, each independent packing, fitted with screw and specifications.

This case is only applicable to MEGA16U2 version, does not apply to CH340 version

Transparent Acrylic Case Shell For MEGA 2560 R3

Order Quantity

Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



Carton for MEGA 2560 R3

Carton for MEGA 2560 R3

Order Quantity

Sample(50-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



1. equipped with screw copper column and installation instructions.
 2. appearance size: 114mm * 65 mm * 18 mm
 3. material: plastic
- Only the shell, don't pack UNO board

color : Transparent or black

**Transparent ABS
Plastic Shell For
Arduino mega 2560 R3**

Order Quantity

Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



This is an arduino uno R3 development board of the acrylic fixed plate, the above can be installed a arduino uno R3 main board and an 8 cm * 5 cm - 400 hole bread board, screws and firm, the experiment is convenient.

Material: 12 cm * 8.3 cm A level 1 yakeli board, power supply screw 4 stars, fixed nut 4 star, 4 star gasket, four silicone mat.

Weight: 50 g

Shipment does not contain UNO R3 mainboard and bread plate.

**experimental platform
UNO R3 board fixed
universal Acrylic for
arduino**

Order Quantity

Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



XH-W1209 digital thermostat high-precision temperature controller shell acrylic shell protective shell

Only the shell, don't pack XH-W1209 board

**Transparent Acrylic
Case Shell For XH-
W1209**

Order Quantity

Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



Servo Bracket holder for the SG90 Micro 9g Servo.
It comes complete with the screws.
Made of Plexiglass, pictures contain protective brown tape which peels off.

**Servo Mount Holder
Bracket For SG90
Micro 9g Servo RC**

Order Quantity

Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



E18 photoelectric sensor bracket infrared obstacle avoidance bracket photoelectric switch bracket

**E18 photoelectric
sensor bracket
infrared obstacle
avoidance bracket**

Order Quantity

Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



OV7670 camera module bracket.
This bracket comes with screws.
Without OV7670 camera module.

**OV7670 camera
module bracket**

Order Quantity

Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



5" touch screen housing LCD screen capacitive screen housing assembly can be fixed for raspberry pie display

5inch Capacitive Touch Screen Holder for Raspberry Pi

Order Quantity

Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



7" touch screen housing LCD screen capacitive screen housing assembly can be fixed for raspberry pie display

7inch Capacitive Touch Screen Holder for Raspberry Pi

Order Quantity

Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



- 1.compatible with 5 V, 3.3 V
- 2.Apply to MB102 breadboard
- 3.Input voltage: 6.5-12 V (DC) or USB power supply
- 4.Output voltage: 3.3V/5V
- 5.Size:240*200*8.5mm

SYB-500 Bread Board Breadboard DIY Solderless PCB

Order Quantity


Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K

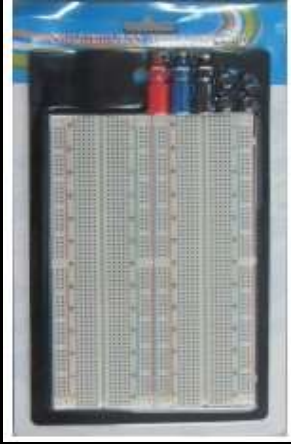

- Bread plate is designed for non-welded
- Two terminal strips: 1260 Jack
 - Four distribution strip: 400 jack
 - Three terminals
 - bottom: black aluminum
 - Phosphor bronze nickel plated spring clips
 - matching jumper, diameter 0.8mm
 - Plastic parts: ABS
 - Purpose: The experiment, testing, robot
 - Features: recycling, recycling, structural clarity of colors, easy to use, bread plate at the fixed unit assembly
 - accept custom design (color, size, etc.)

**ZY-204 1660 Points
Soldless Breadboard**

Order Quantity

Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K

**Solderless Breadboard
- 830 Tie Points (ZY-201) (PIC/Arduino/AVR + AU Stock)**

Order Quantity

Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



- Comes in white for that clean look (not transparent)
- 3 Binding Posts
 - 1 Terminal Strip, 630 Tie-points
 - 2 Distribution Strips, 200 Tie-points
 - Breadboard size 16.5×5.4×0.85 (cm)
 - Coloured coordinates for easy component placement
 - Accepts a variety of wire sizes (AWG:20-29)
 - Excellent for DIY projects, prototyping and experimenting

**ZY-208 3220 Points
Soldless Breadboard**

Order Quantity

Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



- Four terminal strips: 2520 Jack
- Seven distribution strip: 700 jack
- Four terminal
- bottom: black aluminum
- Phosphor bronze nickel plated spring clips
- matching jumper, diameter 0.8mm
- Plastic parts: ABS
- Purpose: The experiment, test
- Features: recycling, recycling, structural clarity of colors, easy to use, bread plate at the fixed unit assembly



- *Breadboard power supply module,
- *Compatible with 5 V, 3.3 V
- *Apply to MB102 breadboard
- *Input voltage: 6.5-9 V (DC) or USB power supply
- *Output voltage: 3.3V/5V can switch over
- *Maximum output current: <700 ma
- *Fluctuation two road independent control,
- *can switch over to 0 V, 3.3 V, 5 V

MB102 Breadboard Power Supply Module 3.3V/5V For Raspberry Pi Arduino

Order Quantity

Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



- *Compatible with 5 V, 3.3 V
- *Apply to MB102 breadboard
- *Input voltage: 6.5-9V (DC) or USB power supply
- *Output voltage: 3.3V/5V can switch over
- *Maximum output current: <700 ma
- *Fluctuation 2 road independent control, can switch over to 0 V, 3.3 V, 5 V
- *On-board two groups of 3.3V, 5V DC output plug pin

Breadboard Power Supply Module 5V/3.3V For Arduino

Order Quantity


Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K

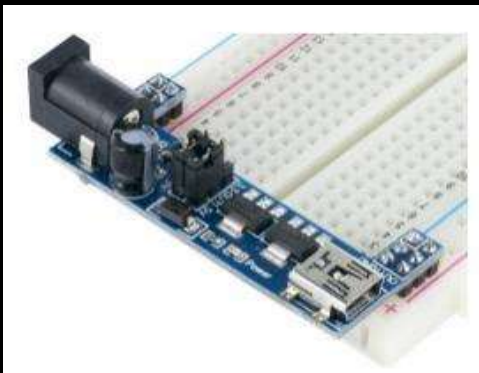

- *Compatible with 5 V, 3.3 V
- *Apply to MB102 breadboard
- *Input voltage: 6.5--9V (DC) or USB power supply
- *Output voltage: 3.3V/5V can switch over
- *Maximum output current: <700 ma
- *Fluctuation 2 road independent control, can switch over to 0 V, 3.3 V, 5 V
- *On-board two groups of 3.3V, 5V DC output plug pin

Breadboard Power Supply Module 3.3V 5V USB for Arduino Raspberrv Pi Board

Order Quantity


Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K

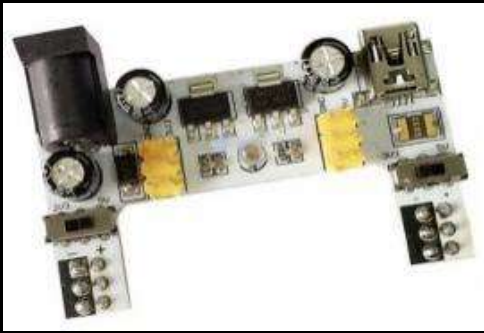

- *Compatible with 5 V, 3.3 V
- *Apply to MB102 breadboard
- *Input voltage: 6.5-9V (DC) or USB power supply
- *Output voltage: 3.3V/5V can switch over
- *Maximum output current: <700 ma
- *Fluctuation 2 road independent control, can switch over to 0 V, 3.3 V, 5 V
- *On-board two groups of 3.3V, 5V DC output plug pin

White Breadboard Power Supply Module 5V/3.3V For Arduino

Order Quantity


Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K

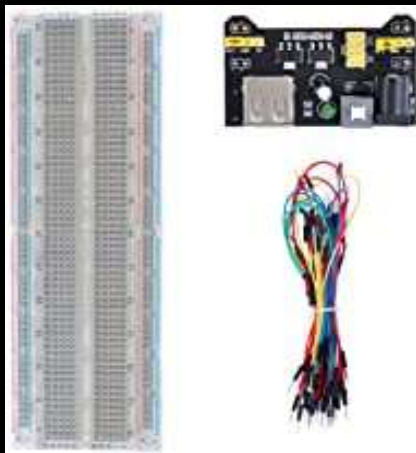

- 1.compatible with 5 V, 3.3 V
- 2.Apply to MB102 breadboard
- 3.Input voltage: 6.5-9V (DC) or USB power supply
- 4.Output voltage: 3.3V/5V can sw

3.3V/5V Breadboard power module+830 points Bread board +65 Flexible iumber

Order Quantity

Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



- 1.compatible with 5 V, 3.3 V
- 2.Apply to MB102 breadboard
- 3.Input voltage: 6.5-9V (DC) or USB power supply
- 4.Output voltage: 3.3V/5V can sw

3.3V/5V Breadboard power module (red)+830 points Bread board +65 Flexible

Order Quantity

Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



1. compatible with 5 V, 3.3 V
2. Apply to MB102 breadboard
3. Input voltage: 6.5-9V (DC) or USB power supply
4. Output voltage: 3.3V/5V can sw

3.3V/5V Breadboard power module (blue)+830 points Bread board +65 Order Quantity

Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



1. compatible with 5 V, 3.3 V
2. Apply to MB102 breadboard
3. Input voltage: 6.5-9V (DC) or USB power supply
4. Output voltage: 3.3V/5V can sw

3.3V/5V Breadboard power module (white)+830 points Bread board +65 Order Quantity

Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



- Selection of 75 kinds of gear pack (single spindle crown worm gear rack sleeve double bevel tee) Shaft size is different:
 Nine kinds of spindle straight teeth
 11 kinds of crown gear
 12 kinds of single-gear
 19 kinds of double gear
 Connecting rack 2
 Seven kinds of pulleys
 2 kinds of worm
 Bushings 6
 A sleeve tee
 Bevel gears 1
 Five kinds of belt

75 kinds of gear pack (plastic motor gear package)

Order Quantity

Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



**34 kinds of gear pack
(plastic motor gear
package)**

Order Quantity

Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



Specification:

Material:stainless steel

Weight:15g

Color:silver

Electrical conductivity: 1M

Features:

1.This product uses conductive stainless steel can be produced Texture is soft, not rust.

2.This product can meet your daily over some industrial production needs.

**Conductive Sewing
Thread Wearable for
LilyPad**

Order Quantity

Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



Claws Material: Hard aluminum alloy

Paw maximum angle distance:55mm

Overall length of claws:108mm (paw maximum length of the overall closed)

Claws overall width:98mm

Color: Silver

**Manipulator Aluminum
Robot Arm Robotic for**

Quantity


Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K

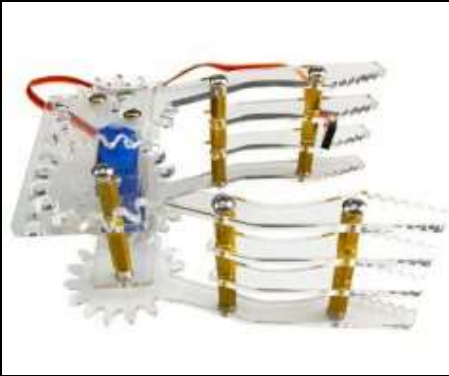

Excluding 9g servo. Delivery for manipulator parts, need to install, with installation drawings. Acrylic manipulator. Made of copper and acrylic. Easy installation.

9g servo acrylic manipulator

Order Quantity

Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K

Connecting wire



1. quantity: 65 pcs
2. different length: 9 - 16 cm
3. type : male to male
4. color: different colors

65pcs Shield cable Male to Male wire kit

Order Quantity

Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



1. quantity: 75 pcs
2. different length: 9 - 16 cm
3. type : male to male
4. color: different colors

75pcs Shield cable Male to Male wire Kit

Order Quantity


Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K

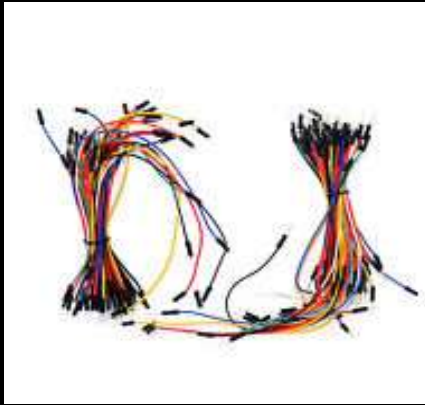

1. quantity: 130 pcs
2. different length: 9 - 16 cm
3. type : male to male
4. color: different colors

**130pcs Shield cables
Male to Male wire kit**

Order Quantity

Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



1. Color: red, orange, yellow, green, blue, purple, gray, brown, white.
2. Including length: 2,5,7,10,12,15,17, 20,22,25,50,75,100,125 mm
3. Box size: 165 × 55 × 10mm

**140pcs Solderless
Breadboard Jumper
Cable Wire Kit Box DIY
Shield For Arduino**

Order Quantity

Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



1. length : 20cm
2. Color random : Black,Red,Green,Blue,White , yellow
3. MOQ: 100pcs each color
4. Specification:
Male-Male
Female-Female
Male-Female at Optional

**20cm Single1P-1P
Dupont Wire Color
Jumper Cable For
Arduino**

Order Quantity

Sample(200-1000)

1000-5000pcs

5K-10K

10K-20K

>20K



- 1.length : 20cm 2 pin header
2. horn side to female:Compatible with 2.54mm spacing pin headers
- 3.Used for Arduino
4. The red line in the middle

**2.54 horn side to Female
3Pin DuPont line 20cm**

Order Quantity

Sample(50-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K


1. 2PIN, 3PIN, 4PIN, 5PIN, 6PIN, 8PIN, 10PIN

Length 100mm, wire specification 1571#28, core is 7 strands of 0.11mm tinned copper, outer diameter 0.9mm. Terminals in the same direction

The price is for 2Pin

Other Size At Optional:

- 2PIN +0.02USD, 3PIN +0.04USD,
- 4PIN +0.06USD, 5PIN +0.08USD,
- 6PIN + 0.1USD, 8PIN +0.12USD,
- 10PIN +0.16USD

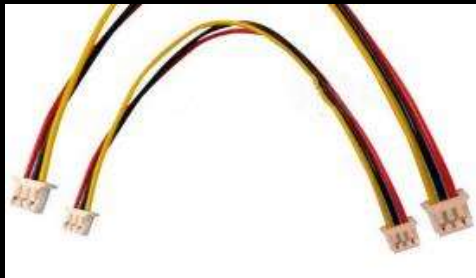

**1.25mm pitch 100MM
double-head terminal line
2Pin 3Pin 4Pin 5Pin 6Pin
8Pin 10Pin Terminals in**

Order Quantity

Sample(50-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K

**20cm Female to Female
2Pin DuPont line**

Order Quantity

Sample(50-100pcs)

101-1000pcs


1001-5000pcs

5K-10K

>10K



- 1.length : 20cm 2 pin header
2. female to female:Compatible with 2.54mm spacing pin headers
- 3.Used for Arduino

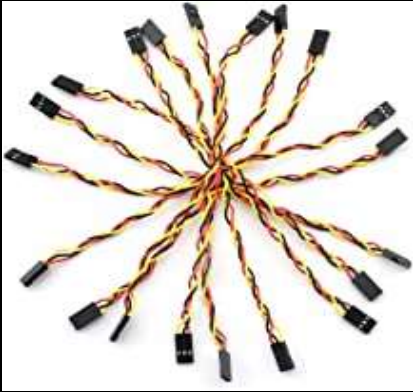

- 1.length : 20cm 3pin header
- 2. female to female:Compatible with 2.54mm spacing pin headers
- 3.Used for Arduino

**20cm Female to Female
3Pin DuPont line 20cm
2.54mm**

Order Quantity

Sample(50-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



- 1.length : 20cm 1p-1p pin header
- 2. female to female:Compatible with 2.54mm spacing pin headers
- 3.Dupont cable:40pcs wires in one l

**20cm Female to Female
4Pin DuPont wire**

Order Quantity

Sample(50-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



- 1.length : 20cm 1p-1p pin header
- 2. female to female:Compatible with 2.54mm spacing pin headers
- 3.Dupont cable:40pcs wires in one l

**20cm Female to Female
5Pin DuPont wire**

Order Quantity

Sample(50-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



- 1.length : 20cm 1p-1p pin header
2. female to female:Compatible with 2.54mm spacing pin headers
- 3.Dupont cable:40pcs wires in one l

**20cm Female to Female
6Pin DuPont wire**

Order Quantity

Sample(50-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



- 1.length : 20cm 8 pin header
2. female to female:Compatible with 2.54mm spacing pin headers
- 3.Used for Arduino

**20cm Fmale to Female
8 Pin DuPont line**

Order Quantity

Sample(50-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



- 1.length : 20cm 1p-1p pin header
2. female to female:Compatible with 2.54mm spacing pin headers
- 3.Dupont cable:40pcs wires in one

**20cm Female to Female 40Pin
Solderless Jumper
Breadboard Wires
Order Quantity**

Sample(25-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



- 1.length : 20cm 1p-1p pin header
- 2. male to male:Compatible with 2.54mm spacing pin headers
- 3.Dupont cable:40pcs wires in one line

**20cm Male TO Male
40Pin Solderless
Jumper Breadboard
Wires**

Order Quantity

Sample(25-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



- 1.length : 20cm 1p-1p pin header
- 2. male to female:Compatible with 2.54mm spacing pin headers
- 3.Dupont cable:40pcs wires in one lin

**20cm Male TO Female
40Pin Solderless
Jumper Breadboard
Wires**

Order Quantity

Sample(25-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



- 1.length : 30cm 1p-1p pin header
- 2. female to female:Compatible with 2.54mm spacing pin headers
- 3.Dupont cable:40pcs wires in one l

**30cm Female to
Female 40Pin
Solderless Jumper
Breadboard Wires**

Order Quantity

Sample(25-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



- 1.length : 30cm 1p-1p pin header
- 2. male to female:Compatible with 2.54mm spacing pin headers
- 3.Dupont cable:40pcs wires in one lin

**30cm Male TO Female
40Pin Solderless
Jumper Breadboard
Wires**

Order Quantity

Sample(25-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



- 1.length : 30cm 1p-1p pin header
- 2. male to male:Compatible with 2.54mm spacing pin headers
- 3.Dupont cable:40pcs wires in one line

**30cm Male TO Male
40Pin Solderless
Jumper Breadboard
Wires**

Order Quantity

Sample(25-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



- 1.length : 10cm 1p-1p pin header
- 2. female to female:Compatible with 2.54mm spacing pin headers
- 3.Dupont cable:40pcs wires in one

**10cm Female to
Female 40Pin
Solderless Jumper
Breadboard Wires**

Order Quantity

Sample(25-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



- 1.length : 10cm 1p-1p pin header
- 2. male to male:Compatible with 2.54mm spacing pin headers
- 3.Dupont cable:40pcs wires in one line

**10cm Male TO Male
40Pin Solderless
Jumper Breadboard
Wires**

Order Quantity

Sample(25-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



- 1.length : 10cm 1p-1p pin header
- 2. male to female:Compatible with 2.54mm spacing pin headers
- 3.Dupont cable:40pcs wires in one lin

**10cm Male TO Female
40Pin Solderless
Jumper Breadboard
Wires**

Order Quantity

Sample(25-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



- 1.length : 15cm 1p-1p pin header
- 2. female to female:Compatible with 2.54mm spacing pin headers
- 3.Dupont cable:40pcs wires in one

**15cm Female to
Female 40Pin
Solderless Jumper
Breadboard Wires**

Order Quantity

Sample(25-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



- 1.length : 15cm 1p-1p pin header
- 2. male to male:Compatible with 2.54mm spacing pin headers
- 3.Dupont cable:40pcs wires in one line

**15cm Male TO Male
40Pin Solderless
Jumper Breadboard
Wires**

Order Quantity

Sample(25-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



- 1.length : 15cm 1p-1p pin header
- 2. male to female:Compatible with 2.54mm spacing pin headers
- 3.Dupont cable:40pcs wires in one lin

**15cm Male TO Female
40Pin Solderless
Jumper Breadboard
Wires**

Order Quantity

Sample(25-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



- 1.length : 40cm 1p-1p pin header
- 2. female to female:Compatible with 2.54mm spacing pin headers
- 3.Dupont cable:40pcs wires in one

**40cm Female to
Female 40Pin
Solderless Jumper
Breadboard Wires**

Order Quantity

Sample(25-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



- 1.length : 40cm 1p-1p pin header
- 2. male to male:Compatible with 2.54mm spacing pin headers
- 3.Dupont cable:40pcs wires in one line

**40cm Male TO Male
40Pin Solderless
Jumper Breadboard
Wires**

Order Quantity

Sample(25-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



- 1.length : 40cm 1p-1p pin header
- 2. male to female:Compatible with 2.54mm spacing pin headers
- 3.Dupont cable:40pcs wires in one lin

**40cm Male TO Female
40Pin Solderless
Jumper Breadboard
Wires**

Order Quantity

Sample(25-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



- 1.length : 50cm 1p-1p pin header
- 2. female to female:Compatible with 2.54mm spacing pin headers
- 3.Dupont cable:40pcs wires in one

**50cm Female to
Female 40Pin
Solderless Jumper
Breadboard Wires**

Order Quantity

Sample(25-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



- 1.length : 50cm 1p-1p pin header
- 2. male to male:Compatible with 2.54mm spacing pin headers
- 3.Dupont cable:40pcs wires in one line

**50cm Male TO Male
40Pin Solderless
Jumper Breadboard
Wires**

Order Quantity

Sample(25-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



- 1.length : 50cm 1p-1p pin header
- 2. male to female:Compatible with 2.54mm spacing pin headers
- 3.Dupont cable:40pcs wires in one lin

**50cm Male TO Female
40Pin Solderless
Jumper Breadboard
Wires**

Order Quantity

Sample(25-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



8Pin to dual 8pin computer 8-pin graphics card power cord 8P to dual 6+2 power supply line one point two extension cord 1 point 2.

All copper core wire customization

Product length: 20cm

Product use: Connect the spare CPU 8P to the graphics card power supply line to solve the problem of insufficient graphics card power supply lines.

**Power CPU 8P to
graphics card dual 6+2
power supply line**

Order Quantity

Sample(25-100pcs)


101-1000pcs

1001-5000pcs

5K-10K

>10K

Resistor & Capacitor

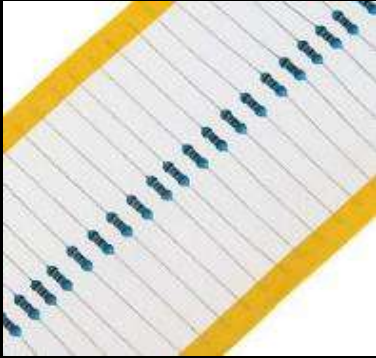

1Ω, 2.2Ω, 4.7Ω, 5.6Ω, 7.5Ω, 8.2Ω, 10Ω, 15Ω, 22Ω, 27Ω, 33Ω, 39Ω, 47Ω, 56Ω, 68Ω, 75Ω, 82Ω, 100Ω, 120Ω, 150Ω, 180Ω, 220Ω, 270Ω, 330Ω, 390Ω, 470Ω, 510Ω, 680Ω, 820Ω, 1KΩ, 1.5KΩ, 2.2KΩ, 3KΩ, 3.9KΩ, 4.7KΩ, 5.6KΩ, 6.8KΩ, 7.5KΩ, 8.2KΩ, 10KΩ, 15KΩ, 22KΩ, 33KΩ, 39KΩ, 47KΩ, 56KΩ, 68KΩ, 75KΩ, 82KΩ, 100KΩ, 150KΩ, 180KΩ, 220KΩ, 330KΩ, 470KΩ, 560KΩ, 680KΩ, 1MΩ, 1.5MΩ, 2MΩ, 3.3MΩ, 4.7MΩ, 5.6MΩ at Optional
1/4W resistor 1% precision 0.25W colored ring
MOQ: 5000PCS/Value

1/4W Metal Film resistors

Order Quantity

Sample(5K-10K)

11K-50K

50K-100K

101K-500K

>500K



1000pcs/lot/Value--Value at Optinonal
0, 10, 12, 15, 18, 20, 22, 33, 47, 51, 56, 68, 75, 82, 91, 100, 120, 150, 180, 200, 220, 330, 470, 560, 680, 750, 820, 910, 1K, 1.2K, 1.5K, 1.8K, 2K, 2.2K, 3.3K, 4.7K, 5.1K, 5.6K, 6.8K, 7.5K, 8.2K, 9.1K, 10K, 12K, 15K, 18K, 20K, 22K, 33K, 47K, 51K, 56K, 68K, 75K, 82K, 91K, 100K, 120K, 150K, 180K, 200K, 220K, 330K, 470K, 510K, 560K, 680K, 750K, 820K, 910K, **1M, 1.2M, 1.5M, 1.8M, 2.0M, 2.2M, 3.3M, 4.7M, 5.1M** add 0.0002USD
Packed as Picture

1/4W Carbon Film Resistors ±5%

Order Quantity

Sample(5K-10K)

11K-50K

50K-100K

101K-500K

>500K



1Ω 2.2Ω 4.7Ω 5.1Ω 6.2Ω 6.8Ω 7.5Ω 8.2Ω 10Ω 11Ω 12Ω 15Ω 18Ω 20Ω 22Ω 24Ω 27Ω 30Ω 33Ω 36Ω 39Ω 43Ω 47Ω 51Ω 56Ω 62Ω 68Ω 75Ω 82Ω 91Ω 100Ω 110Ω 120Ω 150Ω 180Ω 200Ω 220Ω 240Ω 270Ω 300Ω 330Ω 360Ω 390Ω 430Ω 470Ω 510Ω 560Ω 620Ω 680Ω 750Ω 820Ω 910Ω 1KΩ 1.1KΩ 1.2KΩ 1.5KΩ 1.8KΩ 2KΩ 2.2KΩ 2.4KΩ 2.7KΩ 3KΩ 3.3KΩ 3.6KΩ 3.9KΩ 4.3KΩ 4.7KΩ 5.1KΩ 5.6KΩ 6.2KΩ 6.8KΩ 7.5KΩ 8.2KΩ 9.1KΩ 10KΩ 11KΩ 12KΩ 15KΩ 18KΩ 20KΩ 22KΩ 24KΩ 27KΩ 30KΩ 33KΩ 36KΩ 39KΩ 43KΩ 47KΩ 51KΩ 56KΩ 62KΩ 68KΩ 75KΩ 82KΩ 91KΩ 100KΩ 120KΩ 150KΩ 180KΩ 200KΩ 220KΩ 240KΩ 270KΩ 300KΩ 330KΩ 360KΩ 390KΩ 430KΩ 470KΩ 510KΩ 560KΩ 620KΩ 680KΩ 750KΩ 820KΩ 910KΩ 1MΩ 1.2MΩ 1.5MΩ 1.8MΩ 2.0MΩ 2.2MΩ 3.3MΩ 4.7MΩ 5.1MΩ

1/4W Carbon film resistor ±5%

Order Quantity


Sample(5K-10K)

11K-50K

50K-100K

101K-500K

>500K



1Ω 2.2Ω 4.7Ω 5.1Ω 6.2Ω 6.8Ω 7.5Ω 8.2Ω 10Ω
 12Ω 15Ω 18Ω 20Ω 22Ω 24Ω 27Ω 30Ω 33Ω 36Ω 39Ω 43Ω 47Ω
 51Ω 56Ω 62Ω 68Ω 75Ω 82Ω 91Ω 100Ω
 110Ω 120Ω 150Ω 180Ω 200Ω 220Ω 240Ω 270Ω 300Ω 330Ω
 360Ω 390Ω 430Ω 470Ω 510Ω 560Ω 620Ω
 680Ω 750Ω 820Ω 910Ω 1KΩ 1.1KΩ 1.2KΩ 1.5KΩ
 1.8KΩ 2KΩ 2.2KΩ 2.4KΩ 2.7KΩ 3KΩ 3.3KΩ 3.6KΩ 3.9KΩ
 4.3KΩ 4.7KΩ 5.1KΩ 5.6KΩ 6.2KΩ 6.8KΩ 7.5KΩ 8.2KΩ 9.1KΩ
 10KΩ 11KΩ 12KΩ 15KΩ 18KΩ 20KΩ 22KΩ 24KΩ 27KΩ 30KΩ
 33KΩ 36KΩ 39KΩ 43KΩ
 47KΩ 51KΩ 56KΩ 62KΩ 68KΩ 75KΩ 82KΩ 91KΩ 100KΩ
 120KΩ 150KΩ 180KΩ 200KΩ 220KΩ 240KΩ 270KΩ 300KΩ
 330KΩ 360KΩ 390KΩ 430KΩ 470KΩ 510KΩ 560KΩ 620KΩ
 680KΩ 750KΩ 820KΩ 910KΩ
 1MΩ, 1.2MΩ, 1.5MΩ, 1.8MΩ, 2.0MΩ, 2.2MΩ, 3.3MΩ,
 4.7MΩ, 5.1MΩ

**1/2W 0.5W Carbon
 Film Resistor ±5%**

Order Quantity


Sample(1K-10K)

11K-50K

50K-100K

100K-500K

>500K

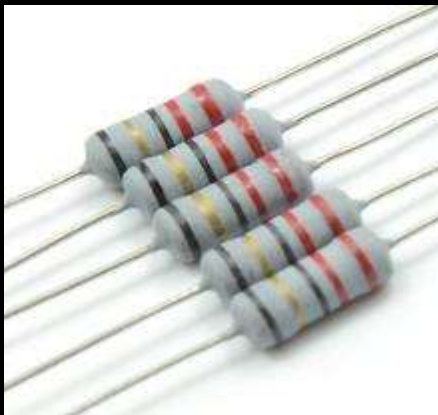

0. 1Ω, 0.22Ω, 0.33Ω, 0.47Ω, 0.68Ω, 1.0Ω, 1.2Ω, 1.5Ω,
 1.8Ω, 2.2Ω, 3.3Ω, 3.9Ω, 4.7Ω, 5.6Ω, 6.8Ω, 8.2Ω, 10Ω,
 12Ω, 15Ω, 18Ω, 20Ω, 22Ω, 33Ω, 47Ω, 51Ω, 56Ω, 68Ω,
 75Ω, 82Ω, 91Ω, 100Ω, 120Ω, 150Ω, 180Ω, 200Ω, 220Ω,
 330Ω, 470Ω, 510Ω, 560Ω, 680Ω, 750Ω, 820Ω, 910Ω,
 1KΩ, 1.2KΩ, 1.5KΩ, 1.8KΩ, 2KΩ, 2.2KΩ, 3.3KΩ,
 4.7KΩ, 5.1KΩ, 5.6KΩ, 6.8KΩ, 7.5KΩ, 8.2KΩ, 9.1KΩ,
 10KΩ, 12KΩ, 15KΩ, 18KΩ, 20KΩ, 22KΩ, 33KΩ,
 47KΩ, 51KΩ, 56KΩ, 68KΩ, 75KΩ, 82KΩ, 91KΩ,
 100KΩ, 120KΩ, 150KΩ, 180KΩ, 200KΩ, 220KΩ,
 330KΩ, 470KΩ, 510KΩ, 560KΩ, 680KΩ, 750KΩ,
 820KΩ, 910KΩ, 1MΩ, 1.2MΩ, 1.5MΩ,
 2.0MΩ, 2.2MΩ, 3.3MΩ, 4.7MΩ, 5.1MΩ

**1W Carbon Film
 Resistor ±5%**

Order Quantity

Sample(1K-10K)

11K-50K

50K-100K

100K-500K

>500K



0. 1Ω, 0.2Ω, 0.33Ω, 0.47Ω, 0.68Ω, 1Ω, 1.2Ω, 1.5Ω, 1.8Ω,
 2Ω, 2.2Ω 4.7Ω 5.1Ω 6.2Ω 6.8Ω 7.5Ω 8.2Ω 10Ω 11Ω
 12Ω 15Ω 18Ω 20Ω 22Ω 24Ω 27Ω 30Ω 33Ω 36Ω 39Ω 43Ω 47Ω
 51Ω 56Ω 62Ω 68Ω 75Ω 82Ω 91Ω 100Ω
 120Ω 150Ω 180Ω 200Ω 220Ω 240Ω 270Ω 300Ω 330Ω 360Ω
 390Ω 430Ω 470Ω 510Ω 560Ω 620Ω
 680Ω 750Ω 820Ω 910Ω 1KΩ 1.1KΩ 1.2KΩ 1.5KΩ
 1.8KΩ 2KΩ 2.2KΩ 2.4KΩ 2.7KΩ 3KΩ 3.3KΩ 3.6KΩ 3.9KΩ
 4.3KΩ 4.7KΩ 5.1KΩ 5.6KΩ 6.2KΩ 6.8KΩ 7.5KΩ 8.2KΩ 9.1KΩ
 10KΩ 12KΩ 15KΩ 18KΩ 20KΩ 22KΩ 24KΩ 27KΩ 30KΩ 33KΩ
 36KΩ 39KΩ 43KΩ
 47KΩ 51KΩ 56KΩ 62KΩ 68KΩ 75KΩ 82KΩ 91KΩ 100KΩ
 120KΩ 150KΩ 180KΩ 200KΩ 220KΩ 240KΩ 270KΩ 300KΩ
 330KΩ 360KΩ 390KΩ 430KΩ 470KΩ 510KΩ 560KΩ 620KΩ
 680KΩ 750KΩ 820KΩ 910KΩ

**2W Carbon Film
 Resistor ±5%**

Order Quantity

Sample(500-2000)

2000-10K

11K-100K

101K-500K

>500K




0.1Ω, 0.2Ω, 0.33Ω, 0.47Ω, 0.68Ω

**5W Carbon Film Resistor ±5%
Order Quantity
Sample(100-2000)
2000-10K
11K-100K
101K-500K
>500K**




1Ω, 1.2Ω, 1.5Ω, 1.8Ω, 2Ω, 2.2Ω, 4.7Ω, 5.1Ω, 6.2Ω, 6.8Ω, 7.5Ω, 8.2Ω, 10Ω, 11Ω, 12Ω, 15Ω, 18Ω, 20Ω, 22Ω, 24Ω, 27Ω, 30Ω, 33Ω, 36Ω, 39Ω, 43Ω, 47Ω, 51Ω, 56Ω, 62Ω, 68Ω, 75Ω, 82Ω, 91Ω, 100Ω, 120Ω, 150Ω, 180Ω, 200Ω, 220Ω, 240Ω, 270Ω, 300Ω, 330Ω, 360Ω, 390Ω, 430Ω, 470Ω, 510Ω, 560Ω, 620Ω, 680Ω, 750Ω, 820Ω, 910Ω, 1KΩ, 1.1KΩ, 1.2KΩ, 1.5KΩ, 1.8KΩ, 2KΩ, 2.2KΩ, 2.4KΩ, 2.7KΩ, 3KΩ, 3.3KΩ, 3.6KΩ, 3.9KΩ, 4.3KΩ, 4.7KΩ, 5.1KΩ, 5.6KΩ, 6.2KΩ, 6.8KΩ, 7.5KΩ, 8.2KΩ, 9.1KΩ, 10KΩ, 11KΩ, 12KΩ, 15KΩ, 18KΩ, 20KΩ, 22KΩ, 24KΩ, 27KΩ, 30KΩ, 33KΩ, 36KΩ, 39KΩ, 43KΩ, 47KΩ, 51KΩ, 56KΩ, 62KΩ, 68KΩ, 75KΩ, 82KΩ, 91KΩ, 100KΩ, 120KΩ, 150KΩ, 180KΩ, 200KΩ, 220KΩ, 240KΩ, 270KΩ, 300KΩ, 330KΩ, 360KΩ, 390KΩ, 430KΩ, 470KΩ, 510KΩ, 560KΩ, 620KΩ, 680KΩ, 750KΩ, 820KΩ, 910KΩ, 1MΩ

**5W Carbon Film Resistor ±5%
Order Quantity
Sample(100-2000)
2000-10K
11K-100K
101K-500K
>500K**

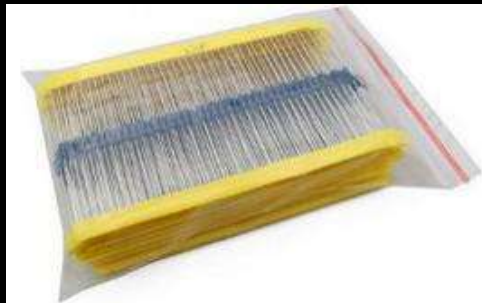

**30 Kinds of common value ;
20pcs/each Total: 600pcs/lot**
Specifications are as follows:
10Ω, 22Ω, 47Ω, 100Ω, 150Ω, 200Ω, 220Ω, 270Ω, 330Ω, 470Ω, 510Ω, 680Ω, 1KΩ, 2KΩ, 2.2KΩ, 3.3KΩ, 4.7KΩ, 5.1KΩ, 6.8KΩ, 10KΩ, 20KΩ, 47KΩ, 51KΩ, 68KΩ, 100KΩ, 220KΩ, 300KΩ, 470KΩ, 680KΩ, 1M
1 / 4W resistor 1% precision 0.25W


**1/4W metal film resistor
package kit
600pcs/lot
Order Quantity
Sample(20-100pcs)
101-1000pcs
1001-5000pcs
5K-10K
>10K**

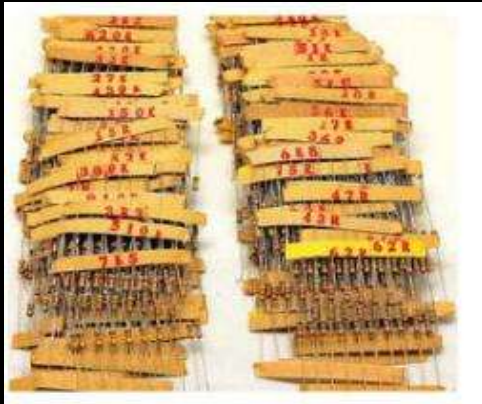

43 kinds of common value Each of the 20pcs
 Total: 860pcs/lot
 Resistance is as follows:
 1Ω, 10Ω, 20Ω, 22Ω, 33Ω, 47Ω, 51Ω, 68Ω, 75Ω, 82Ω, 91Ω, 100Ω, 150Ω, 200Ω, 220Ω, 330Ω, 470Ω, 510Ω, 680Ω, 750Ω, 820Ω, 910Ω, 1 kΩ, 10 kΩ, 20 kΩ, 33 kΩ, 47 kΩ, 51 kΩ, 68 kΩ, 75 kΩ, 82 kΩ, 91 kΩ, 100 kΩ, 200 kΩ, 220 kΩ, 330 kΩ, 470 kΩ, 510 kΩ, 680 kΩ, 750 kΩ, 820 kΩ, 910 kΩ, 1MΩ
 1 / 4W resistor 5% precision 0.25W

1/4W Carbon film resistor package kit
Order Quantity

Sample(20-100pcs)
 101-1000pcs
 1001-5000pcs
 5K-10K
 >10K

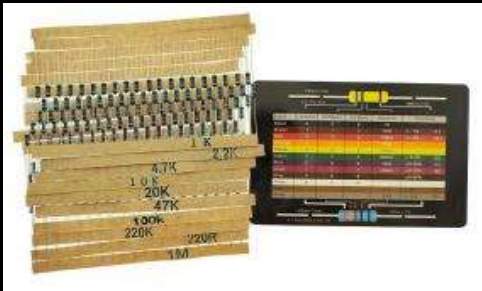

10 Kinds of common value, 20pcs/each
Total: 200pcs/lot and A resistance card
 Specifications are as follows:
 220R, 2.2K, 4.7K, 1K, 10K, 20K, 47K, 100K, 220K, 1M
 1 / 4W resistor 1% precision 0.25W

1/4W Metal film resistor package kit
 200pcs/lot
Order Quantity

Sample(20-100pcs)
 101-1000pcs
 1001-5000pcs
 5K-10K
 >10K



1pF 2pF 4pF 8pF 10pF 15pF 18pF 22pF 30pF 33pF 47pF 50pF 56pF 68pF 100pF 120pF 150pF 180pF 220pF 300pF 330pF 470pF 560pF 680pF 820pF 1nF 1.5nF 2.2nF 3.3nF 4.7nF 6.8nF 10nF, 15nF 22nF 33nF 47nF 68nF 100nF add0.0004USD

Ceramic Capacitor
Order Quantity

Sample(1K-10K)
 11K-50K
 50K-100K
 101K-500K
 >500K



precision 1% thermistor NTC-MF52-103/3435
10K 3435±1

precision 1% thermistor
NTC-MF52-103/3435 10K
3435±1

Order Quantity

Sample(1K-10K)

11K-50K

50K-100K

101K-500K

>500K



MF11 NTC Thermistor Negative Temperature
10K 103 Black Diameter 5mm

MF11 NTC thermistor 103

Order Quantity

Sample(1K-10K)

11K-50K

50K-100K

101K-500K

>500K



Single potentiometer, amplifier potentiometer,
handle long 15MM
B1K,B2K,B5K,B10K,B20K,
B50K,B100K,B250K,B500K,B1M

Single Union
Potentiometer

Order Quantity

Sample(100-1000)

1001-5000pcs

5001-10000pcs

10K-100K

>100K



WH148 Potentiometer Kit B1K 2K 5K 10K 20K 50K 100K 500K 1M 15mm Linear Taper Rotary Potentiometer Resistor Set 3pin With Cap

WH148 Single Union Potentiometer kit

Order Quantity

Sample(5-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K

0932 Single Union Potentiometer

Order Quantity

Sample(100-1000)

1001-5000pcs

5001-10000pcs

10K-100K

>100K



Single potentiometer, amplifier potentiometer, L about 19.5MM, handle long 12MM B1K, B2K, B5K, B10K, B20K, B50K, B100K, B500K, B1M (B102, B103, B104, B203, B204, B105, B502, B503, B504)

3386P Precision adjustable Potentiometer

Order Quantity

Sample(100-1000)

1001-5000pcs


5001-10000pcs

10K-100K

>100K



1K, 5K, 10K, 50K, 100K (P102, P502, P103, P503, P104)

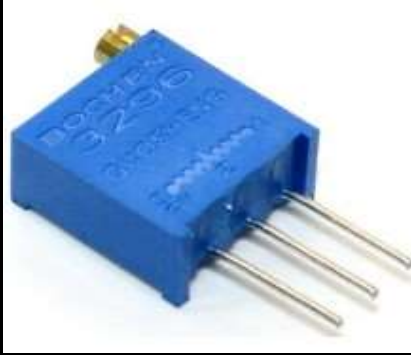

100R(101), 200R(201), 500R(501), 1K(102),
2K(202), 3K(302), 5K(502), 10K(103),
20K(203), 30K(303), 50K(503), 100K(104),
200K(204), 500K(504)

1M(105), 2M(205) add 0.021usd each.

10R(100), 20R(200), 50R(500), add 0.088usd each.

**3296W Precision Trimmer
Multiturn Preset Top
Potentiometer**

Order Quantity

Sample(100-1000)

1001-5000pcs

5001-10000pcs

10K-100K

>100K



100R(101), 200R(201), 500R(501), 1K(102),
2K(202), 5K(502), 10K(103), 20K(203),
50K(503), 100K(104), 200K(204), 500K(504),
1M(105)

**3362P Adjustable Single
Turn Trimmer
Potentiometer High
Precision**

Order Quantity

Sample(100-1000)

1001-5000pcs

5001-10000pcs

10K-100K

>100K



100R(101), 200R(201), 500R(501),
1K(102), 2K(202), 2.2K(222), 5K(502),
10K(103), 20K(203), 50K(503), 100K(104),
200K(204), 500K(504), 1M(105)

**RM065 trimpot trimmer
potentiometer adjustable
resistance**

Order Quantity

Sample(100-1000)

1001-5000pcs

5001-10000pcs

10K-100K

>100K



150pcs RM065 Trimming Potentiometer Kit
 100/200/470/1K/3.3K/4.7K/10K/20K/30K/47K/100K/200K/300K/500K/1M ohm 10pcs RM-065 potentiometer for each resistance

150pcs RM065 Trimming Potentiometer Kit

Order Quantity


Sample(5-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



47uF/16V; 10uF/25V; 4.7uF/50V;
 100uF/50V; 100uF/16V; 47uF/25V;
 220uF/50V; 220uF/16V; 100uF/25V;
 2200uF/25V; 10uF/50V; 330uF/50V;
 470uF/16V; 220uF/25V; 1uF/50V;
 33uF/50V; 330uF/25V; 3.3uF/50V;
 47uF/50V;
 Add 0.0016usd for : 470uF/25V; 100uF/50V;
 1000uF/25V; 6.8uF/50V ;220uF/50V;
 470uF/50V ; 470uF/16V;
 1000uF/16V; 330uF/25V; 2200uF/25V;
 330uF/50V ;
 Add 0.0016usd. for: 470uF/50V :

Electrolytic capacitor

Order Quantity

Sample(1K-10K)

11K-50K

50K-100K

101K-500K

>500K

LDR 5516

photoresistor

Order Quantity

Sample(1K-10K)

11K-50K

50K-100K

101K-500K

>500K

LDR 5549

photoresistor

Order Quantity

Sample(1K-10K)

11K-50K



5mm 5516 photoresistor photoelectric switches
 photoelectric sensors light control switch
 Bright 5-10KΩ, dark 0.2MΩ
 Packing List: 200pcs/bag



5mm 5549 photoresistor photoelectric switches
 photoelectric sensors light control switch



Maximum voltage (V DC): 150
 Maximum power dissipation (mW): 100
 Ambient temperature (° C): -30 --- +70
 Spectral peak (nm): 560
 Resistance (10Lux) (KΩ) :5-10
 Dark resistance (MΩ): 0.8
 100λ10: 0.6
 Response Time (ms): rose: 30
 Decline: 30
 Resistance characteristic of illuminance: 2

50K-100K
 101K-500K
 >500K

**LDR 50cm lead wire
 Photoresistor sensor**

Order Quantity


Sample(10-20pcs)

21-100pcs

101-1000pcs

1001-5000pcs

>5000pcs

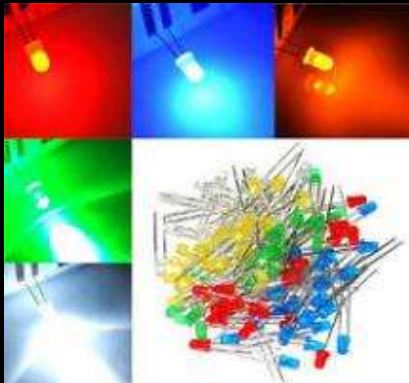

1) Colors:white,yellow,red,green,Blue
 2) Long legs

3mm LED light (leg Pin
 Length: 28MM)
 (1000Pcs/Lot)

Order Quantity

Sample(1K-10K)

11K-50K

50K-100K

101K-500K

>500K



full-color LED 5MM 4pin legs controllable RGB
 Red Green Blue 3-color RGB Colorful lights
1)LED: Diffused / Water Clear
2)Common Anode / Common Cathode
 please tell us which one you want.

4Pin 5mm RGB light

Order Quantity


Sample(1K-10K)

11K-50K

50K-100K

101K-500K

>500K

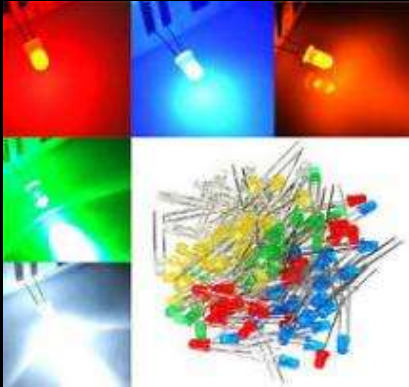

- 1) Colors: white, yellow, red, green, Blue, Orange
- 2) Long legs

5mm LED light (leg Pin Length: 28MM)
(1000Pcs/Lot)

Order Quantity

Sample(1K-10K)

11K-50K

50K-100K

101K-500K

>500K



- 1) Colors: white, yellow, red, green
- 2) LED light-emitting diode lamp beads legs
- 3) **Yellow Color add 4usd,**
White Color add 7usd,
Green add 15usd

5MM SuperFlux Piranha LED Lamp Full Color CommonAnode Multi-Color Led(1000Pcs/Lot)

Order Quantity

Sample(1K-10K)

11K-50K

50K-100K

101K-500K

>500K



200PC/Lot 3MM 5MM short feet Led Kit With Box Mixed Color Red Green Yellow Blue White Light Emitting Diode Assortment 20PCS Each

200PC 3MM 5MM short feet Led With Box Mixed Color Light Emitting Diode Kit

Order Quantity

Sample(10-100pcs)

101-1000pcs

1001-3000pcs

3001-5000pcs

>5000pcs



3MM mercury switch 101 position switch switch
switch tilt angle

3MM Mercury Switch

Order Quantity

Sample(100-1K)

1K-10K

11K-50K

51K-100K

>100K



Vibration switch vibration / shaking Switch / ball
switch angle switch tilt switch

**SW-200D ball switch/switch
tilt switch**

Order Quantity

Sample(1K-10K)

11K-50K

50K-100K

101K-500K

>500K



Vibration switch vibration / shaking Switch / ball
switch angle switch tilt switch
Model SW-520D

**SW-520D ball switch/switch
tilt switch**

Order Quantity

Sample(1K-10K)

11K-50K

50K-100K

101K-500K

>500K

Type Ball class
Maximum voltage 12V
Rated thermal current 0.1A
Operating temperature -40 to 75 °C
Insulation resistance 300Ω
Material number vibration switch



1. When the switch is in the stationary state, as shown in (ON) below the level of the end of 15 degrees, the switch is in the ON state;
 2. When (OFF) side below the level of 15 degrees, the switch is in OFF state;
 3. When subjected to external shaking forces and shaking reached, or when the conduction angle is set in the range, the conductive pin electrical characteristics will produce short or continuous conduction
 4. When the switch is OFF side angle of 15 degrees below the horizontal, while shaking difficult to trigger conduction;
 5. The trigger switch for low current circuit, does

Golden SW-520D Ball switch Angle switch Tilt Switch Sensor

Order Quantity

Sample(1K-10K)

11K-50K

50K-100K

101K-500K

>500K

SW-520D Double Ball Switch

Order Quantity


Sample(1K-10K)

11K-50K

50K-100K

101K-500K

>500K

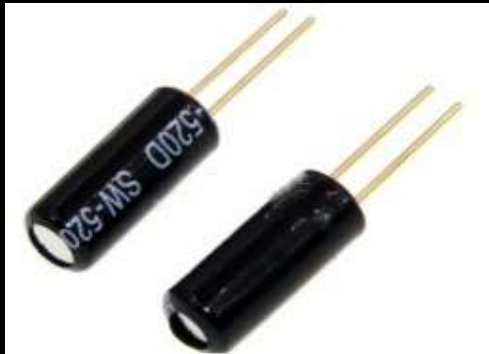

Double Ball Switch
 High-sensitive SW-520D Double Ball Switch
 Angle Tilt Switch Vibration Switch

Flame Sensor or 940nm Infrared receiving F5MM (4000-20000 Hz)

Order Quantity

Sample(500-10K)

11K-50K

50K-100K

101K-500K

>500K



1) Infrared receiving tube 940 nm infrared lamp monitoring fill light F5MM night vision camera light emitting diode LED
 2) Flame Sensor for Smart Car
 3) Long legs

940nm Infrared transmitting F5MM

Order Quantity

Sample(1K-10K)


11K-50K



1) Infrared transmitting tube 940 nm infrared lamp monitoring fill light F5MM night vision camera light emitting diode LED

2) Long legs

50K-100K
101K-500K
>500K

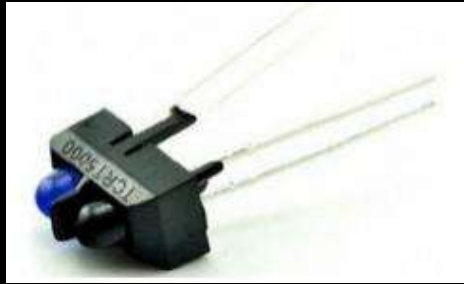

Sensing Distance: 12mm
 Operating Wavelength: 950 nm
 Package Height: 7 mm
 Sensing Method: Reflective
 Reverse Voltage: 5V
 Forward Current: 60mA
 Forward Surge Current: 3A
 Emitter Power Dissipation: 100mW
 Collector Emitter Voltage: 70V
 Emitter Collector Voltage: 5V
 Collector Current: 100mA
 Detector Power Dissipation: 100mW
 Sensor Total Power Dissipation: 200mW
 Operating Temperature: -25°C ~ +85°C

TCRT5000
Photoelektrischer Sensor
Modul Reflektion
Lichtschranke Tracking

Order Quantity

Sample(100-500pcs)

501-1000pcs

1001-5000pcs

5K-10K

>10K

IR Infrared Receiver
TL1838 VS1838B

Order Quantity

Sample(100-500pcs)

501-1000pcs

1001-5000pcs

5K-10K

>10K



Infrared receiver HS/VS1838

DS18B20 1-wire Temp
Sensor

Order Quantity


Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K

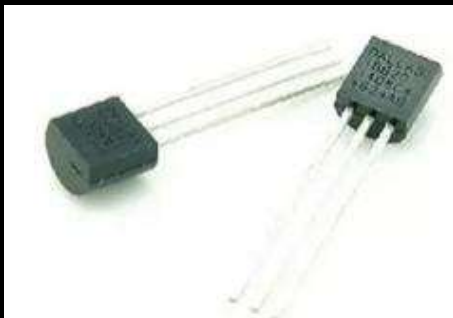

DS18B20 1-wire Temp Sensor
 Original chipset

LM35DZ TO-92 temperature
sensor



LM35DZ TO-92 temperature sensors

Order Quantity
Sample(20-100pcs)
101-1000pcs
1001-5000pcs
5K-10K
>10K




TMP36GZ TMP36GT9Z TO-92 temperature sensors

TMP36GZ TMP36GT9Z TO-92 temperature sensor
Order Quantity
Sample(20-100pcs)
101-1000pcs
1001-5000pcs
5K-10K
>10K




QRD1114 Reflective photo interruption sensor photoelectric switch analog output

QRD1114 reflective photo interruption sensor
Order Quantity
Sample(50-100pcs)
101-1000pcs
1001-5000pcs
5K-10K
>10K

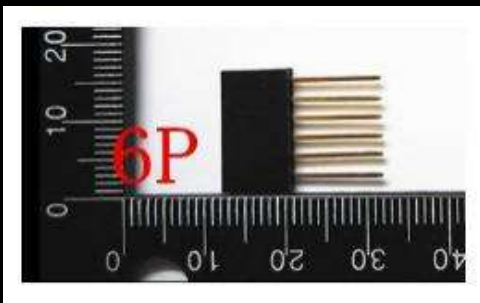

Header 6-pin 2.54mm for Arduino Shields Gold Plating
 can choose:
 8PIN add0.01USD;
 10PIN add0.017USD

Header 6-pin 2.54mm for Arduino Shields Gold Plating 44MM
Order Quantity
Sample(200-10K)
11K-50K
50K-100K
101K-500K

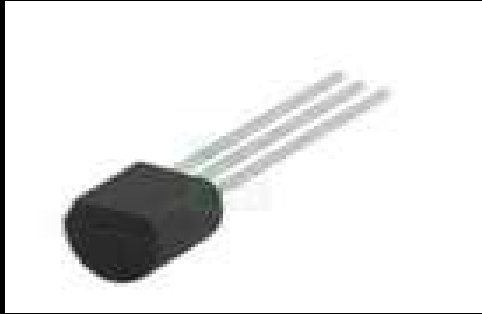

Header 6-pin 2.54mm for Arduino Shields Gold Plating
 can choose:
 8PIN add0.01USD;
 10PIN add0.017USD

>500K

PN2222A NPN

Order Quantity

Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



2 * 20p 2.54mm double row female socket
 longer needle needle length 12.2mm plastic
 high 8.3 +2.54

2 * 20p 2.54mm double row female socket plus long needle

Sample(200-1K)

1K-10K

11K-50K

51K-100K

>100K



Black 2.54 mm spacing row needle jump short circuit cap cap sub block

2.54 mm spacing jump cap

Order Quantity

Sample(1K-10K)

11K-50K

50K-100K

101K-500K

>500K



Single Row 2.54 mm Pitch / 1X40P / 1*40 Pin
 Header Length: 11MM

Single Row 2.54 mm Pitch / 1*40 Pin

Order Quantity

Sample(200-1K)

1K-10K



40 pins header strip socket 2.54mm
Header Length: 17MM

11K-50K
51K-100K
>100K
40 pins header strip
socket 2.54mm
Order Quantity
Sample(200-1K)

1K-10K
11K-50K
51K-100K
>100K



40 pins header strip socket 2.54mm
With single straight needle
long:10CM
color: Red, yellow, blue, green, white black

2.54mm 1*40P Color
single header
Order Quantity
Sample(200-1K)

1K-10K
11K-50K
51K-100K
>100K




Round hole female seat 1 * 40P single row
round hole seat 2.54mm 18B20 / crystal socket

2.54mm 1*40P Round hole
row mother
Order Quantity
Sample(200-1K)

1K-10K
11K-50K
51K-100K
>100K

IC imported Amegaszor -
PU UNO R3 main chip for
arduino

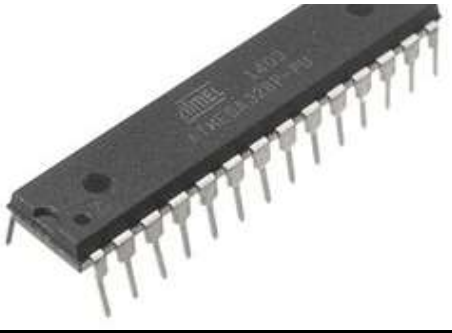


Chips are rigorously tested before shipment each chip will burn Bootloader program, please get the goods loaded after energization test under L lamp will light if off for 1 second for 3 seconds on the Arduino UNO R3, stop cycle to detect the chip is good or bad.

Order Quantity
Sample(10-20pcs)
 21-100pcs
 101-1000pcs
 1001-5000pcs
 >5000pcs

Atmega328P MCU IC with
 uno r3 Bootloader and
 16MHz Crystal

Sample(10-20pcs)
 21-100pcs
 101-1000pcs
 1001-5000pcs
 >5000pcs

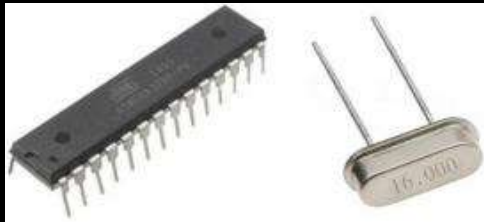


1. Atmega328P MC
2. 16MHz Crystal
3. pinout sticker

74HC595N

Order Quantity

Sample(100-500pcs)
 501-1000pcs
 1001-5000pcs
 5001-10K
 >10K

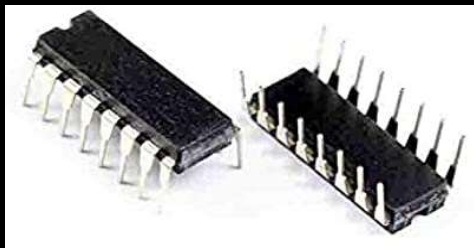

74HC595N 8-bit serial input / output / parallel output register DIP-16

L293D Stepper Driver Chip DIP-16

Order Quantity

Sample(100-500pcs)
 501-1000pcs
 1001-5000pcs
 5001-10K
 >10K



L293 L293D Stepper Driver Chip/Driver Quad Diode DIP-16



MAX7219 MAX7219CNG MAX7219ENG DIP24
In-line display driver

MAX7219 DIP24

Order Quantity

Sample(20-50pcs)

51-100pcs

101-1000pcs

1001-5000pcs

>5000pcs



GAL22V10D-7LPN DIP-24

GAL22V10D-7LPN DIP-24

Order Quantity

Sample(20-50pcs)

51-100pcs

101-1000pcs

1001-5000pcs

>5000pcs



In-line 4N35 4N35M optocoupler transistor output DIP-6

4N35 4N35M Optocoupler transistor output DIP-6

Order Quantity

Sample(100-500pcs)

501-1000pcs

1001-5000pcs

5001-10K

>10K



EL4N35 Direct Plug Taiwan DIP-6 4N35 Optical Coupling

EL4N35 Direct Plug Taiwan DIP-6 4N35 Optical Coupling

Order Quantity

Sample(100-500pcs)

501-1000pcs



1001-5000pcs
5001-10K
>10K



3V,5V,9V Universal Active buzzer

Active Buzzer (3V or 5V or 9V)

Order Quantity

Sample(100-500pcs)

501-1000pcs

1001-5000pcs

5K-10K

>10K



12V Universal Active buzzer

Active Buzzer (12V)

Order Quantity

Sample(100-500pcs)

501-1000pcs

1001-5000pcs

5K-10K

>10K



1. in common use 3V,5V,9V,12V
2. 12085 16Ω Universal Passive buzzer

Passive buzzer

Order Quantity

Sample(100-500pcs)

501-1000pcs

1001-5000pcs

5K-10K

>10K

9055 Passive buzzer

Order Quantity





Electromagnetic passive integrated buzzer 9*
5.5mm high-temperature buzzer alarm horn 5V
42Ω

Sample(100-500pcs)

501-1000pcs

1001-5000pcs

5K-10K

>10K



Model: MC-38 normally closed (conducted together)
Appearance size: 27*14*10 mm
Action distance: 18mm ± 6mm
Life: 1 million times
Switch output: normally closed (conducted together)
This is a pair that is magnetically held together
Normally closed: the magnet is close to conduction, and the magnet is disconnected when it leaves
The wire length of the door magnet is 32cm

MC-38 Door Magnetic Burglar Alarm

Order Quantity

Sample(25-100pcs)

101-1000pcs

1001-3000pcs

3001-5000pcs

>5000pcs



Transmit power:150mW
Standard size:Φ6*10.5
life span:More than 1000 hours
Spot mode:Spotted spot, continuous output
Laser wavelength:650nm (red)
Light output power:<5mW
Supply voltage:5VDC
Working current:<40mA
Operating temperature: -36°C ~ 65°C
Storage temperature:-36°C ~ 65°C
Spot size:The light spot at 15 meters is φ10mm~φ15mm

Laser small copper head (red light)

Order Quantity

Sample(100-500pcs)

501-1000pcs

1001-5000pcs

5K-10K

>10K



material :environmental protection level 5 PP raw material
Size : 14.5 x8.8x4 cm
1. Non-toxic 5 PP raw material, the drop resistance, impact resistance, flexibility;
2. Stackable, oil resistant, sealing, high temperature resistant, waterproof, light;
3. The corrosion resistance is strong, not with acid-base reaction;
4. The insulation effect is good;

Transparent tool box electronics parts box 01

Order Quantity

Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

4. The insulation effect is good;



material :environmental protection level 5 PP raw material

Size:16.5*7.5*4.5CM

1. Non-toxic 5 PP raw material, the drop resistance, impact resistance, flexibility;
2. Stackable, oil resistant, sealing, high temperature resistant, waterproof, light;
3. The corrosion resistance is strong, not with acid-base reaction;
4. The insulation effect is good;

>10K

Transparent tool box
electronics parts box 01A

Order Quantity

Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



Material : environmental protection level 5 PP raw material

Size : (length x width x height) 18.3 x8.8x4.5 cm

Transparent tool box
electronics parts box 02

Order Quantity

Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



Transparent tool box/ electronics parts box /storage box / induction box (18.3 x8.8x4.5 cm)

Transparent tool box
electronics parts box

Order Quantity

Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K

SMD storage box / SMD
electronic component
boxes LT-00G2

Order Quantity

Sample(20-100pcs)

1)Material: plastic

2)LT-00G1 white yellow green black red and blue 25 × 31.5 × 21.5MM 6g (0.2USD)

3)LT-00G2 Green 75 × 31.5 × 21.5MM 16g





(0.36USD)
 4)LT-00G3 Red 75 × 63 × 21.5MM 27g
 (0.62USD)
 5)LT-00G4 yellow 125 × 63 × 21.5MM 42 g
 (0.68USD)

101-1000pcs
1001-5000pcs
5K-10K
>10K




12.8*6.5*2.1cm

10Grids Plastic Component Storage
Order Quantity
Sample(20-100pcs)
101-1000pcs
1001-5000pcs
5K-10K
>10K



17.3*9.9*2.2cm
 Inner grid: 3.3*3cm

15Grids Plastic Component Storage
Order Quantity
Sample(20-100pcs)
101-1000pcs
1001-5000pcs
5K-10K
>10K

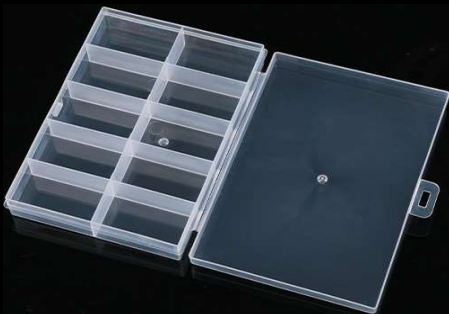

12.9*9*1.8CM

10Grids Plastic Component Storage
Order Quantity
Sample(20-100pcs)
101-1000pcs
1001-5000pcs
5K-10K
>10K



8 Grids Plastic Component Storage



20*13.3*4.6cm

Order Quantity
Sample(20-100pcs)
101-1000pcs
1001-5000pcs
5K-10K
>10K



22.5 * 15.5 * 6cm

A total of two layers, the lower layer can all be relieved

12 Grids Plastic Component Storage
Order Quantity
Sample(20-100pcs)
101-1000pcs
1001-5000pcs
5K-10K
>10K



23.2 * 19 * 5.0cm

A total of two layers
 Transparent lid, orange box body;
 1. Environmental protection and non-toxic No. 5 PP material, drop resistance, impact resistance, flexibility
 2. Stackable, oil resistant, sealed, high temperature resistant, waterproof, light weight.
 3. Strong anti-corrosion ability, does not react with acid and alkali,
 4. Good insulation effect.
 5. UV protection

23 Grids Thick Plastic Component Storage
Order Quantity
Sample(32-100pcs)
101-1000pcs
1001-5000pcs
5K-10K
>10K



Material: PP soft rubber material
 Hardware: nickel plated steel
 Spring: nickel plated steel
 Rivet: brass
 Wire: 1007 # 26 awg
 Exposed wire length: 150 mm 3 mm on the tin
 Color: black
 External: two length is 15 cm 26 lines (red and black)

2 on the NO.5 battery box
AA 3v battery pack
Order Quantity
Sample(100-500pcs)
501-1000pcs
1001-5000pcs
5K-10K

>10K



4 on the NO.5 battery box , back to back
Size: 54.95*30.51*29.23mm

back to back 4AA Batteries
Storage Box Holder without
DC head

Order Quantity

Sample(100-500pcs)

501-1000pcs

1001-5000pcs

5K-10K

>10K



1. 9V battery pack with battery box
2. with cover
3. switch
4. DC head of 2.1MM * 5.5MM

5.5MM male plug case box
holder w cover for 9V
battery

Order Quantity

Sample(50-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



1. 2AA battery pack with battery box
2. with cover
3. switch
4. DC head of 2.1MM * 5.5MM

5.5MM male plug case box
holder w cover for 2AA
battery

Order Quantity

Sample(50-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



6 on the NO.5 battery box , back to back

back to back 6AA Batteries
Storage Box Holder

Order Quantity

Sample(50-100pcs)

101-1000pcs



1001-5000pcs

5K-10K

>10K



4 on the NO.5 battery box , back to back
(length around 140 mm).
Power Jack diameter 2.1 mm / 5.5 mm male

back to back 4AA Batteries
Storage Box Holder

Order Quantity

Sample(50-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



8 on the NO.5 battery box , back to back
(length around 140 mm).
Power Jack diameter 2.1 mm / 5.5 mm male

back to back 8AA Batteries
Storage Box Holder

Order Quantity

Sample(50-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



18650 lithium battery charger lithium-slot
charger 3.7v 18650 14500
Plug Specification: US / EU at Optional

18650 lithium battery
charger

Order Quantity

Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



DC 9V battery cartridge plunger plug wire DC
9V battery holder

9V battery holder with
DC

Order Quantity

Sample(50-100pcs)

101-1000pcs

1001-5000pcs



DC 9V battery cartridge plunger plug wire

5K-10K

>10K

**9V battery holder
without DC**

Order Quantity

Sample(50-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K

**18650 Lithium
universal charger**

Order Quantity

Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K

**Two 18650 Batteries
Storage Box Holder**

Order Quantity

Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K

**Single 18650 lithium
battery combination**

Order Quantity



18650,501,450,016,430 intelligent dual-slot dual charger, automatically stop charging 4.2V 650 (mA)



Double 15CM exposed wire battery box two battery box 18650 box



Combine a set of batteries to two brackets.



Internal space is 18.5MM.

Single black bracket

Single 18650 lithium battery combination bracket With bayonet shape mosaic combination

Sample(100-500pcs)

501-1000pcs

1001-5000pcs

5K-10K

>10K



1. There is a bayonet inside to fix the battery, prevent the battery from rolling, and protect the battery.

2. Environmental protection function. Used batteries can be stored in this box to prevent battery leakage. And through different colored boxes, different types of batteries can be distinguished.

3. This product is well-designed and made of PP high temperature resistant material, which is safe and reliable.

4. Available colors: white, blue, red, green

2pcs 18650 battery storage box 4pcs

Order Quantity

Sample(100-500pcs)

501-1000pcs

1001-5000pcs

5K-10K

>10K



1. Using imported polypropylene raw materials, high transparency and pure color;

2. The mold has high precision, tightly closed and firm connection;

3. The material is sufficient and the box body is thick. Durable and reliable.

Volume; 84x74x23mm

4. Available colors: white, blue, red, green, yellow

4pcs 18650 battery storage box

Order Quantity

Sample(100-500pcs)

501-1000pcs

1001-5000pcs

5K-10K

>10K



1. two 18650 battery pack with battery box

2. with cover

3. switch

4. DC head of 2.1MM * 5.5MM

TWO 18650 Batteries Storage Box Holder With cover switch

Order Quantity


Sample(50-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K

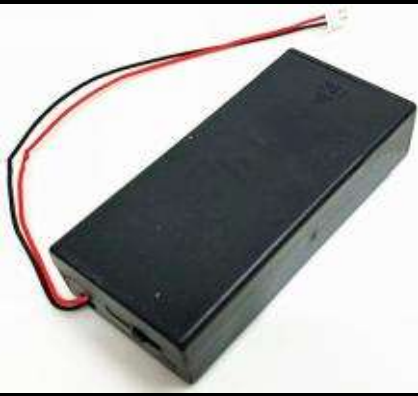

1. two 18650 battery pack with battery box
2. with cover
3. switch
4. Connector: XH2.54-2P

**Two 18650 Batteries
Storage Box Holder With
cover switch**

Order Quantity


Sample(200-1000pcs)

1001-3000pcs

3001-5000pcs

5K-10K

>10K

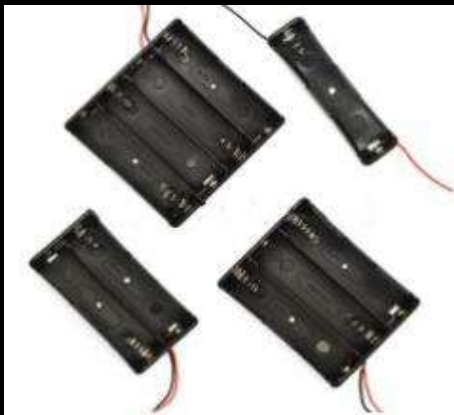

The price is for 2Pin
Other Size At Optional:
2PIN +0.04USD,
3PIN +0.08USD,
4PIN + 0.13USD

**1 or 2 or 3 or 4 18650
9V battery box battery**

Order Quantity

Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



battery box 18650 box
Connector: XH2.54-2P
Other Size At Optional:
3 18650 : +0.08USD,

**Two 18650 Batteries
Storage Box Holder**

Order Quantity

Sample(200-1000pcs)

1001-3000pcs

3001-5000pcs

5K-10K

>10K



- 1)Battery capacity can be installed: 1.5V * 4
- 2)Material: PC plastic + electronic wire + copper rivets
- 3)With DC5.5X2.1 plug

**4AA Batteries Storage
Box Holder**

Order Quantity

Sample(50-100pcs)

101-1000pcs



5) With DC 5.5x2.1 plug

1001-5000pcs
5K-10K
>10K



- 1) Battery capacity can be installed: 1.5V * 4
- 2) Material: PC plastic + electronic wire + copper rivets

**4AA Batteries Storage
 Box without DC**
Order Quantity

Sample(50-100pcs)

101-1000pcs
1001-5000pcs
5K-10K
>10K



- 1. 4AA battery pack with battery box
- 2. with cover
- 3. switch
- 4. with USB female

**USB Female Socket 4 AA
 Battery Case Box Holder**

Order Quantity

Sample(50-100pcs)

101-1000pcs
1001-5000pcs
5K-10K
>10K



6 on the NO.5 battery box

**6AA Batteries Storage
 Box Holder**

Order Quantity

Sample50-100pcs)

101-1000pcs
1001-5000pcs
5K-10K
>10K



**6AA Batteries Storage Box
 Holder without DC**



6 on the NO.5 battery box

Order Quantity

Sample(50-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



1. 8AA battery pack with battery box
2. with cover
3. switch
4. DC head of 2.1MM * 5.5MM

**8AA Batteries Storage
Box Holder**

Order Quantity

Sample(50-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



8 on the NO.5 battery box

**8AA Batteries Storage
Box Holder**

Order Quantity

Sample(50-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



Power plug wire DC2.1MM 9V battery snap
wire DC plug

9V battery snap

Order Quantity

Sample(100-500pcs)

501-1000pcs

1001-5000pcs

5K-10K



wire DC 9V battery snap wire DC plug 15CM

>10K

**9V Battery Snap Clip
Lead Wire**

Sample(100-500pcs)

501-1000pcs

1001-5000pcs

5K-10K

>10K



9V battery button power cable 9V battery button
to alligator clip battery adapter cable

**9V battery button to
alligator clip**

Sample(100-500pcs)

501-1000pcs

1001-5000pcs

5K-10K

>10K



- 1) 20V MAX Supply Voltage 1000MA
- 2) connect the RRD-FAN-EXTENDER to 12V,5V,.. flexible output voltage
- 3) 0.2A MAX currence
- 4) US / EU Plug at Optional
- 5) 5.5x2.5/2.1MM

**Power supply Adapter
9V-1A for arduino
dedicated**

Order Quantity

Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



- 1) 20V MAX Supply Voltage 1000MA
- 2) connect the RRD-FAN-EXTENDER to 12V,5V,.. flexible output voltage
- 3) 0.2A MAX currence
- 4) Interface specification: 5.5*2.5 (compatible with 5.5*2.1)
- 5) US / EU/ UK Plug at Optional

**Power supply Adapter
12V-1A for arduino
dedicated**

Order Quantity

Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



- 1) 20V MAX Supply Voltage 2000MA
- 2) connect the RRD-FAN-EXTENDER to 12V,5V,.. flexible output voltage
- 3) 0.2A MAX currence
- 4) Interface specification: 5.5*2.5 (compatible with 5.5*2.1)
- 5) US / EU Plug at Optional

**Power supply Adapter
5V-2A for arduino
dedicated**

Order Quantity

Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



- 1) INPUT:AC110V-240V
50/60Hz<0.4A
- 2) OUTPUT:DC 5V--2.5A
- 3) US

**Power supply Adapter
5V-2.5A for PI**

Order Quantity

Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



- 1) 20V MAX Supply Voltage 2000MA
- 2) connect the RRD-FAN-EXTENDER to
12V,5V,.. flexible
output voltage
- 3) 0.2A MAX currence
- 4) US / EU Plug at Optional
- 5) 5.5x2.5/2.1MM

**Power supply Adapter
12V-2A for arduino
dedicated**

Order Quantity

Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



- 1) INPUT:AC110V-240V
50/60Hz<0.4A
- 2) OUTPUT:DC 5V--2.5A
- 3) micro USB
- 4) US / EU/ UK Plug at Optional

**Power supply Adapter
5V-2.5A for pi 3 model
R**

Order Quantity


Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



- 1) Brass/Copper/Steel material
- 2) PVC / PE / ABS insulator
- 3) Length chuck: 40mm
- 4) Cable length: 460mm
- 5) The line thickness: 2mm
- 6) this price,1pc
- 7) Length : 46CM

**Crocodile Clips with
lead wire**

Order Quantity

Sample(20-100pcs)

101-1000pcs

1001-5000pcs



8) 10 bundles, sold in bundles

5K-10K

>10K



20CM 10PIN DuPont line with small five-color crocodile clip male

20CM DuPont line with crocodile clip male

Order Quantity

Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



20CM 10PIN DuPont line with small five-color crocodile clip female head

20CM DuPont line with crocodile clip female head

Order Quantity

Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



- 1) Size: 86 * 40 * 6.0mm
- 2) it contains a CR2025 button electric
- 3) control distance: 8 meters farther
- 4) launch tube infrared wavelength: 940Nm
- 5) Crystal: oscillation frequency 455KHz
- 6) IR carrier frequency: 38KHz
- 7) Sticking Material: 0.125mmPET

IR mini remote control for Arduino

Order Quantity

Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



1) external dimension: 86 (length) *40 (width) *6.6 (thickness)
The infrared remote control test can be performed with the okystar 51&AVR test board tx-1c

New IR mini remote control for Arduino

Order Quantity

Sample(20-100pcs)



- 2) standard 38K modulation frequency
- 3) with 0~9 numeric keys, *, # keys, 4 navigation keys and confirmation keys, it can be easily applied to various man-machine interface design
- 4) 3V button battery can be used

101-1000pcs
1001-5000pcs
5K-10K
>10K



Big collection of heat shrink tubing
 Color: Black, Red, Yellow, Blue, Green
 Material: Polyolefin
 Shrinkage Ratio: 2:1
 Operating Temperature: -55°C to +125°C
 Minimum Shrinkage Temp: +70°C
 Full Shrinkage Temp: +110°C Maximum
 Tensile Strength: 10.4 Mpa
 Dielectric Strength: 15 kV/mm
 Flammability: Flame Retardant
 328Pcs(Colourful):
 120pcs ϕ 1.0*40mm; 60pcs ϕ 2.0*40mm
 32pcs ϕ 3.0*40mm; 32pcs ϕ 4.0*40mm
 32pcs ϕ 6.0*40mm; 20pcs ϕ 8.0*80mm
 16pcs ϕ 10.0*80mm; 16pcs ϕ 14.0*80mm

**328pcs 2:1 Polyolefin
 Shrinking Assorted Heat
 Shrink Tube Wrap Wire
 Cable**

Order Quantity

Sample(10-100pcs)

101-1000pcs

1001-3000pcs

3001-5000pcs

>5000pcs



High expansion ratio makes it possible to repair most damaged cable jackets without removing connectors.

Supplied internal diameter: 2.0mm, 2.5mm, 3.5mm, 5.0mm, 7.0mm, 10.0mm, 13.0mm
 Color: Black (as picture shows)
 Shrinkage Ratio: 2:1
 Material: Polyolefin
 30pcs x 2.0 x 40mm; 25pcs x 2.5 x 40mm
 20pcs x 3.5 x 40mm; 20pcs x 5.0 x 40mm
 16pcs x 7.0 x 80mm; 8pcs x 10.0 x 80mm
 8pcs x 13.0 x 85mm; Total:127pcs

**HEAT Shrinkable Tubes
 127PC Shrinkable
 Polyolefin Tube Wraps**

Order Quantity


Sample(10-100pcs)

101-1000pcs

1001-3000pcs

3001-5000pcs

>5000pcs



2 button red and yellow dots, panel 20*40MM, cable length without panel 90MM
 Size: 20*23*90mm
 Color : Green,Red, Blue, Yellow, silver, purple

**Red and yellow two-button
 membrane switch panel**

Order Quantity

Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



2 button red and yellow dots, panel 20*40MM, cable length without panel 90MM
 Size: 20*40*90mm


**Red and yellow two-button
 membrane switch panel**

Order Quantity


Sample(20-100pcs)

101-1000pcs

Size: 20*40*90mm



2 button red and yellow dots, panel 20*57MM,
cable length without panel 90MM
Size: 20*57*90mm



2 button red and yellow dots, panel 20*107MM,
cable length without panel 90MM
Size: 20*107*90mm



3 * 4 matrix keyboard membrane switch control
panel microcontroller Extended Keyboard



1001-5000pcs

5K-10K

>10K

Red and yellow two-button
membrane switch panel

Order Quantity

Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K

Red and yellow two-button
membrane switch panel

Order Quantity

Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K

3 * 4 matrix keyboard

Order Quantity

Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K

4* 4 matrix keyboard

Order Quantity



4 * 4 matrix keyboard 4*4 16 Key Membrane Switch Keypad 4 x 4 Matrix Array Matrix keyboard

Sample(20-100pcs)
101-1000pcs
1001-5000pcs
5K-10K
>10K



Pad Size: 70mm x 20mm x 0.8mm
 Cable Length: 85mm (include connector)
 Mount Style: Self-Adherence
 Circuit Rating: 35VDC, 100mA (Max.)
 Insulation Spec.: 100M Ohm, 100V
 Dielectric Withstand: 250VRms (60Hz, 1min)
 Contact Bounce: <=5ms
 Life Expectancy: 1 million closures
 Operation Temperature: -20 to +40 °C

1*4 Matrix Array 4 Key Membrane
Order Quantity
Sample(20-100pcs)
101-1000pcs
1001-5000pcs
5K-10K
>10K



1. Panel Size: 75*85mm.
2. Length: 18CM.
3. Insulation Resistance: 100M Ω 100V.
4. Withstand Voltage: 250V Rms.(50-60Hz Imin)
5. Storage Temperature: +15°C- +35°C.
6. Storage Humidity: 70%-90%

4*5 Matrix 20 Key Membrane Keypad
Order Quantity
Sample(20-100pcs)
101-1000pcs
1001-5000pcs
5K-10K
>10K



Size: 7x5.2x0.9cm
 Weight: 17g
 3X4 Matrix Keyboard Module
 Color: black
 Package Contents: 1 x keyboard module
 Note: Light shooting and different displays may cause the color of the item in the picture a little different from the real thing. The measurement allowed error is +/- 1-3cm.)

4X3 Matrix Keyboard Keypad Module with 12 Keys 43 Plastic Keys Switch
Order Quantity
Sample(10-100pcs)
101-1000pcs
1001-3000pcs
3001-5000pcs
>5000pcs



100% brand new and high quality.
 16 Button Matrix :
 0-9 # * A-D
 Excellent price-performance ratio
 Easy communication with any microcontroller
 Maximum size 6.5*6.4CM

**4x4 Matrix Keyboard
 Keypad Module Use Key
 PIC AVR Stamp Plastic
 Keys Switch**

Order Quantity
Sample(10-100pcs)
101-1000pcs
1001-3000pcs
3001-5000pcs
>5000pcs



Scope of work: Current (0-2.5A) can detect
 mobile phone charger voltage standard DC5V
 Working range: U = 3 ~ 7.5V I = 0 ~ 2.5A
 Resolution: Voltage 10mV current 10mA
 Error: voltage $\pm 1\%$ current $\pm 2\%$
 Full-scale drop: (when measuring current)
 200mV
 Operating temperature: 0-60 °C
 Size: 53 * 34 * 15mm

**usb power supply
 voltage and current
 detector performance
 test table USB charge
 current detector
 voltage meter**

Order Quantity
Sample(10-100pcs)
101-1000pcs
1001-3000pcs
3001-5000pcs
>5000pcs



1 Introduction:
 a. IN-input is connected to the output port of
 the charger;
 b. RESET-clear button, after pressing for 3-5
 seconds, the screen display will be cleared;
 c. The OUT-output end is connected to the
 USB port of the data cable;
 d. Input voltage display window (3-9V)
 accuracy $\pm 1\%$;
 e. The accuracy of the charging current
 display window (0-3A) is $\pm 1\%$;
 f. Battery capacity display window (0-
 0000mAh).

**KWS-V20 USB voltage
 and current meter or
 mobile power tester**

Order Quantity
Sample(10-100pcs)
101-1000pcs
1001-3000pcs
3001-5000pcs
>5000pcs

1. Introduction:
 a. IN-input is connected to the output port of
 the charger;
 b. RESET-clear button, after pressing for 3-5
 seconds, the screen display will be cleared;

**KWS-V21 USB voltage
 and current meter or
 mobile power tester**

Order Quantity



- seconds, the screen display will be cleared,
- c. The OUT-output end is connected to the USB port of the data cable;
 - d. Input voltage display window (4-20V) accuracy $\pm 1\%$;
 - e. The accuracy of the charging current display window (0-3A) is $\pm 1\%$;
 - f. Battery capacity display window (0-00000mAh):

Sample(10-100pcs)

101-1000pcs

1001-3000pcs

3001-5000pcs

>5000pcs



Color: white, black (optional)
 feature:
 Detect the charging status of the charger in real time, and clearly display indicators such as voltage/current/power.
 High precision, good stability and small error. It is the first choice for electronic enthusiasts;
 The power failure storage function can save data in time for further observation.
 Support the identification of QC2.0, QC3.0, PD, and fast charging protocols.
 Designed with Type-C interface, it has a wide range of applications and is suitable for mobile

KWS-1802C Type-c Bidirectional Current and Voltage Tester
Order Quantity
Sample(10-100pcs)
 101-1000pcs
 1001-3000pcs
 3001-5000pcs
 >5000pcs



Color: White, Black(Optional)
 Feature:
 It adopts 0.96" IPS high definition colorful LCD screen, high brightness, wide angle and has long lifetime.
 Real-time detection of the charger charging status, clearly display the voltage/current/power and other indicators.
 High accuracy and stability, minor errors. It is the first choice for electronics enthusiasts;
 Power failure storage function, it can timely keep the data for further observation.
 Support the identification of QC2.0, QC3.0, PD

KWS-1902C Type-c Bidirectional Current and Voltage Tester
Order Quantity
Sample(10-100pcs)
 101-1000pcs
 1001-3000pcs
 3001-5000pcs
 >5000pcs



Choose a color: black or white
 1.ACE supports 65W/120W super flash charging, you can use the original charger ;
 2. Fast charging identification, widely compatible ;
 3.product information :
 Voltage: 4-30V; Current: 0-6.5A;
 mAh: 0-999999MAH;
 Milliwatt hour: 0-999999MWH;
 Timing: 0-99 hours; Power: 0-200W;
 Charging internal resistance: 0-999.9 ohms;
 Grouping: 1-9 Group V;

KWS-MX18L USB voltage and current meter or mobile power tester
Order Quantity
Sample(10-100pcs)
 101-1000pcs
 1001-3000pcs
 3001-5000pcs
 >5000pcs



Choose a color: black or white
 1. Input/output voltage: 3V-7V;
 2. Voltage resolution: 0.01V;
 3. Input/output current: 0.05A - 3.5A;
 4. Current resolution: 0.01A;
 5. The test capacity range is 0-19999 mA;
 6. Accuracy: plus or minus 1%;
 7. Line loss: about 0.1 ohms;

KCX-017 USB current and voltmeter
Order Quantity
Sample(10-100pcs)
 101-1000pcs
 1001-3000pcs

8. Test content: battery voltage, current, discharge capacity (10 sets of data in total);
 9. Communication function: Yes;
 10. Data calibration function: Yes

3001-5000pcs
>5000pcs

**Fine aluminum knob
 15 * 17mmh black
 bright side (All shaft
 holes)**

Order Quantity

Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



Fine aluminum knob 15 * 17mmh black bright side (All shaft holes)
 Potentiometer knob

**Potentiometer Switch
 Knob Cap 15*17*6mm**

Order Quantity

Sample(200-500pcs)

501-1000pcs

1001-5000pcs

5K-10K

>10K



Name:AG2 Potentiometer Switch Knob Cap
 Diameter: 15mm
 Height: 17mm
 Hole Diameter:6mm
 Color: Red, Blue ,Orangle ,Yellow available
 100pcs= 1 pack, 1 pack a color

**2 feet of vertical touch
 switch micro switch button
 switch 12 * 12 * 5mm**

Order Quantity

Sample(500-1000)

1001-5000pcs

5001-10000pcs

10K-50K

>50K



Push Button 12*12*5MM
 Side 2 feet

**4 feet of vertical touch
 switch micro switch button
 switch 12 * 12 * 5mm**

Order Quantity



Push Button 12*12*5MM

Sample(500-1000)

1001-5000pcs

5001-10000pcs

10K-50K

>50K



Push Button 6*6*5MM

4 feet of vertical touch switch micro switch button switch 6 * 6 * 5mm

Order Quantity

Sample(1K-10K)

11K-50K

51K-100K

100K-500K

>500K



Push Button 6*6*5MM
Side 2 feet

Side 2 feet of vertical touch switch micro switch button switch 6 * 6 * 5mm

Order Quantity

Sample(1K-10K)

11K-50K

51K-100K

100K-500K

>500K



Push Button 6*6*5MM
Middle 2 feet
Needle length: 3.5MM or 12.8MM

Middle 2 feet of vertical touch switch micro switch button switch 6 * 6 * 5

Order Quantity

Sample(1K-10K)

11K-50K

51K-100K

100K-500K

>500K



Push Button 12*12*7.3MM
color: black or yellow

Square head 4 feet or vertical touch switch micro switch button switch 12 *

Order Quantity

Sample(500-1000)

1001-5000pcs

5001-10000pcs



12*12 keycap rounded inner diameter 3.9 * 3.9

color: black,yellow,red,blue,white,green

100pcs= 1 pack, 1 pack a color

10K-50K

>50K

12*12 keycap rounded inner diameter

Order Quantity

Sample(500-1000)

1001-5000pcs

5001-10000pcs

10K-50K

>50K



Package Included:

20PCS 6 * 6 * 4.3

20PCS 6 * 6 * 5

20PCS 6 * 6 * 6

20PCS 6 * 6 * 7

20PCS 6 * 6 * 8

20PCS 6 * 6 * 9.5

20PCS 6 * 6 * 11

15PCS 6 * 6 * 12

15PCS 6 * 6 * 13

10PCS 7 * 7 * 14

Packing: 1*plastic box (including 180 kev switch)

10 types of 180 in-line push button tact switch kits

Order Quantity

Sample(10-100pcs)

101-1000pcs

1001-3000pcs

3001-5000pcs

>5000pcs



3296W Precision Trimmer Multiturn Preset Top Potentiometer,

500R , 1K , 2K , 5K , 10K, 20K, 50K,

100K, 200K , 1M,

10 types of 5 each

50PCS 3296W

Multiturn Trimmer

Order Quantity

Sample(10-100pcs)

101-1000pcs

1001-3000pcs

3001-5000pcs

>5000pcs



Transistor Assortment Kit 10value 200PCS

20 × BC337, 20 × BC327, 20 × 2N2222,

20 × 2N2907, 20 × 2N3904, 20 × 2N3906

200PCS 10value Transistor Assortment

Order Quantity

Sample(10-100pcs)

101-1000pcs




, 20 × S8050 , 20 × S8550 , 20 × A1015 ,
20 × C1815

1001-3000pcs

3001-5000pcs

>5000pcs

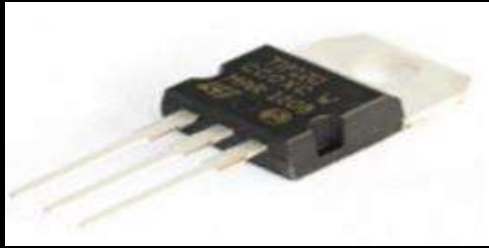

TIP120 Darlington Transistor

**TIP120 TO-220 Darlington
Complementary Silicon
Power Transistors**

Order Quantity


Sample(500-1000)

1001-5000pcs

5001-10000pcs

10K-50K

>50K

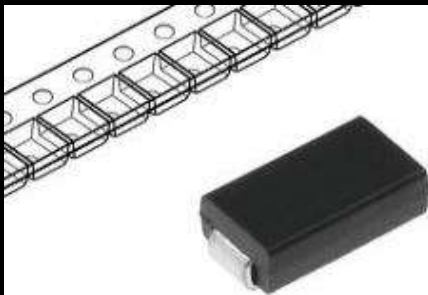

SMD 1N4001 M1 SMA
M1 Diode rectifying SMD 50V 1A SMA

**SMD 1N4001 M1 SMA
(1000pcs/lot)**

Order Quantity

Sample(1K-10K)

11K-50K

51K-100K

100K-500K

>500K



New MIC line rectifier diode 1N4001 IN4001
DO-41 1A 50V

**MIC line rectifier diode
DO-41**

1N4001 IN4001

Order Quantity

Sample(1K-10K)

11K-50K

51K-100K

100K-500K

>500K



New MIC line rectifier diode 1N4007 DO-41
1A 1000V Overall length>45mm
Wire diameter>0.5mm

**MIC line rectifier diode
1N4007 DO41 IN4007**

Order Quantity

Sample(1K-10K)

11K-50K

51K-100K



Color can choose: blue or red ;
 DIP switch DS-1/2/3/4/5/6/7/8/9/10/12-bit
 2.54mm flat dial toggle ;
 DS-02: 0.062USD;
 DS-03: 0.066USD;
 DS-04: 0.068USD;
 DS-05: 0.079USD;
 DS-06: 0.083USD;
 DS-07: 0.088USD;
 DS-08: 0.09USD;
 DS-09: 0.163USD;
 DS-10: 0.114USD: DS-12: 0.154USD:

100K-500K
 >500K

**DIP switch DS-1-bit
 2.54mm flat dial toggle**

Order Quantity

Sample(100-1K)

1K-10K

11K-100K

100K-500K

>500K



2 Pin Screw Terminal Block Connector 5mm
 Pitch 5.08-301-2P

**2 Pin Screw Terminal
 Block Connector 5mm
 Pitch 5.08-301-2P**

Order Quantity

Sample(1K-10K)

11K-50K

51K-100K

100K-500K

>500K



3 Pin Screw Terminal Block Connector 5mm
 Pitch 5.08-301-3P

**3 Pin Screw Terminal
 Block Connector 5mm
 Sample(1K-10K)**

11K-50K

51K-100K

100K-500K

>500K



Size: 25.4mmx 152.4mm
 Black gold plated
 Various IC packages are engraved on the ruler

**Multifunctional PCB
 engineering ruler
 15CM ruler**


Order Quantity

Sample(20-100pcs)



Various IC packages are engraved on the ruler
 Range: 15cm and 6 inch
 Various component packages

101-1000pcs
1001-5000pcs
5K-10K
>10K

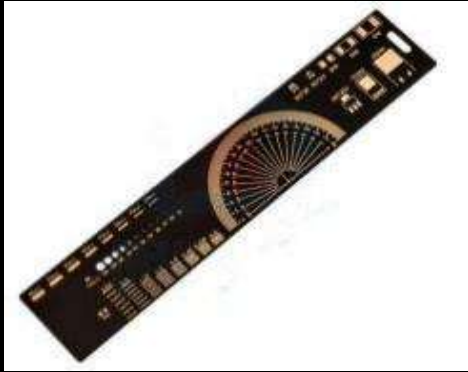

It is an assistant engineer for electronic engineers. It is used to query component packaging information or measure the length of the object.

Positive specifications:

1. Measuring length 20cm
2. Measuring length 7.8 inches
3. Common resistor and capacitor diode SMD package: 0201, 0402, 0603, 0805, 1206, SMA, SMB, SMC
4. Ordinary IC package: SSOP20, TSSOP24, SOP8, LQFP32, LQFP128P
5. Common MOS, Phase Inverter, Transistor, Crystal Oscillator Package: SOT223, SOT23, SOT89, SOT25, SOT5, 3225
6. Common drilling diameter reference size (unit: mil)
7. Suitable for ruler hanging groove

Multifunctional PCB engineering ruler 20CM ruler

Order Quantity
Sample(20-100pcs)

101-1000pcs
1001-5000pcs
5K-10K

>10K



This versatile PCB ruler also integrates PCB design information, such as angle gauges, devices, IC pin spacing tables, and more. Electronic enthusiasts are in desperate need of a measurement tool during the design process and can set all necessary functions.

In addition to basic functions for measuring millimeters and inches, integrated PCB design information such as angle gauges, devices, IC pin spacing meters, resistor and capacitor chip packages, common diameter reference drills, and line width dimension references

We printed this information on the FR-4 gold-plated PCB.

R-4 gold-plated PCB, high-end atmosphere, high hardness, good wear resistance

Multi-function engineering ruler 25CM Immersion gold PCB design tool

Order Quantity
Sample(20-100pcs)

101-1000pcs
1001-5000pcs
5K-10K

>10K



32 pieces of stainless steel 89A32 rangefinder feeler gauge 0.04-0.88mm

Order Quantity



32 pieces of stainless steel 89A32 combined
feeler gauge rangefinder feeler gauge teaching
feeler gauge 0.04-0.88mm

Sample(20-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K



DC voltage: 200mV-1000V $[\pm(0.5\%+2\text{dgt})]$
 AC voltage: 200-7500V $[\pm(1.2\%+10\text{dgt})]$
 DC current: 200uA-10A $[\pm(1.0\%+2\text{dgt})]$
 Resistance: 200Ω-2MΩ $[\pm(0.8\%+2\text{dgt})]$
 Diode tube: yes
 Triode: Yes
 Power supply: 6F22 type 9V battery
 Maximum display: 1999
 Dimensions: 126×70×24mm
 Standard accessories: meter pen, manual, warranty card

DT830B digital multimeter
Order Quantity
Sample(10-100pcs)
 101-1000pcs
 1001-5000pcs
 5K-10K
 >10K




1. DC voltage range:
 200mV/2V/20V/200V/1000V, $\pm(0.5\%+3)$;
 2. AC voltage range:
 200mV/2V/20V/200V/700V, $\pm(0.8\%+5)$;
 3. DC current range: 2mA/20mA/200mA/20A, $\pm(0.8\%+10)$;
 4. AC current range: 2mA/20mA/200mA/20A, $\pm(2.0\%+5)$;
 5. Resistance range:
 200Ω/2kΩ/20kΩ/200kΩ/2MΩ/20MΩ/200MΩ, $\pm(0.8\%+3)$;
 6. Capacitance range:
 200μF/20μF/2μF/200nF/20nF, $\pm(2.5\%+20)$;
 7. Special functions: two and three-pole test; on-off alarm; low voltage display; automatic shutdown; function protection; 200MA gear fuse; 20A gear fuse; shock protection; input impedance (10MΩ); Maximum display (1999); LCD size (59*31mm);
 8. Parameter specifications: body color (green body + yellow silicone cover); body size (121*72*22mm)

9205M Digital Multimeter
Order Quantity
Sample(5-100pcs)
 101-1000pcs
 1001-5000pcs
 5K-10K
 >10K



Exquisite and comfortable handle design, feel particularly good. Lightweight spring design, easy to open and bite, and good anti-fatigue during use;
 Especially suitable for cutting wires, electronic feet, trimming plastic products, cutting small wires, etc. Used for repairs in the electronics industry, jewelry processing, model making, and fishing.

170 diagonal pliers
Order Quantity
Sample(10-100pcs)
 101-1000pcs
 1001-5000pcs
 5K-10K
 >10K

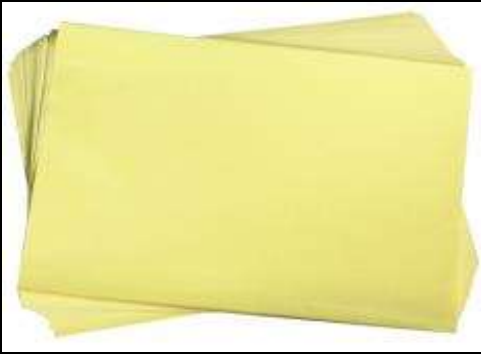

The heating tool used in the production process is an electric iron or a laminator. The transfer paper of this product is a special heat transfer paper for making circuit boards. Using it to make circuit boards has the following advantages:

1. High plate making precision;
2. The cost of plate making is low;
3. Fast plate making speed;
4. Double-sided panels can be produced.

Instructions:

- 1 Use a laser printer to print the circuit diagram of the circuit board onto the glossy side of the thermal transfer paper;
- 2 Use the board making machine to adjust the temperature to 150-180 degrees Celsius, and

**PCB circuit board A4
Thermal Transfer
Paper for PCB Making
(100pcs/bag)**

Order Quantity

Sample(5-100pcs)

101-1000pcs

1001-5000pcs

5K-10K

>10K